


DECK MACHINERY

MARINE FAIRLEAD




导缆滚轮（带座）Guide roller(with stand)

导缆滚轮Guide roller
CB*58-83 JIS F 2014-87

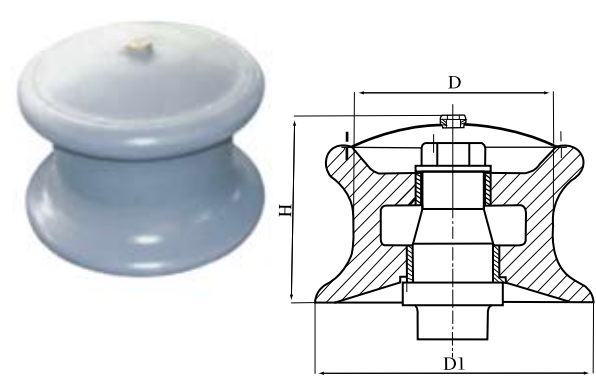


滚轮 直径 Dia. of roller D	适用缆索最大直径（参考） Appropriate cable dia.					外形尺寸 Size			重量 Weight Kg	
	钢索GB1102 抗拉强度为15.2Mpa Steel wire strength			麻索 Hemp rope	合成纤维索 Synthetic fiber rope	D1	H	S	铸铁 Cast iron (HT)	铸钢 Cast steel (ZG)
	6×24	6×30	6×37							
	100	11	11	11	40	28	160	128	3	9.4
150	17	17.5	15	45	32	240	211	3	32.1	33.8
200	22.5	21.5	19.5	55	40	310	251	3	64.6	68.0
250	24	26	24	65	45	380	298	4	108	114.0
300	30	32.5	28	70	50	440	321	4	159	168.0
350	37.5	39	34.5	75	55	500	346	4	235	248.0
400	41	39	39	85	65	560	371	5	336	355.0
450	44.5	47.5	43	—	80	620	394	5	413	462.0

导缆滚轮带座（开式）
Guide roller with stand(open type)
CB*58-83 JIS F2014-87

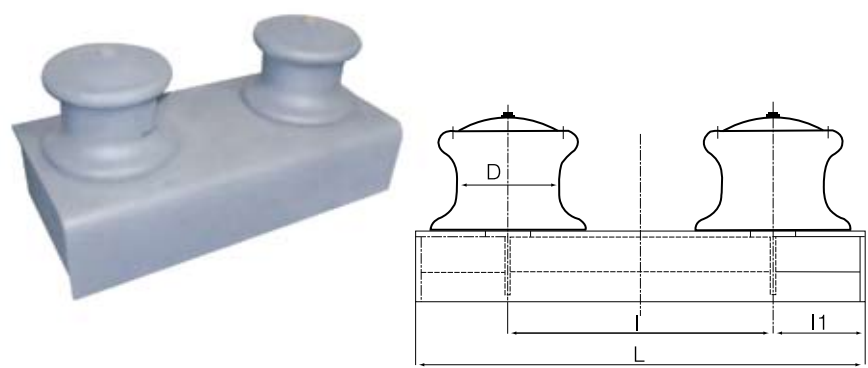

开式二滚轮导缆器
Open type two-roller fairlead

规格Size	D	L	I	I1
150	150	740	420	160
200	200	930	530	200
250	250	1100	640	230
300	300	1270	750	260
350	350	1440	860	290
400	400	1610	970	320
450	450	1800	1080	360

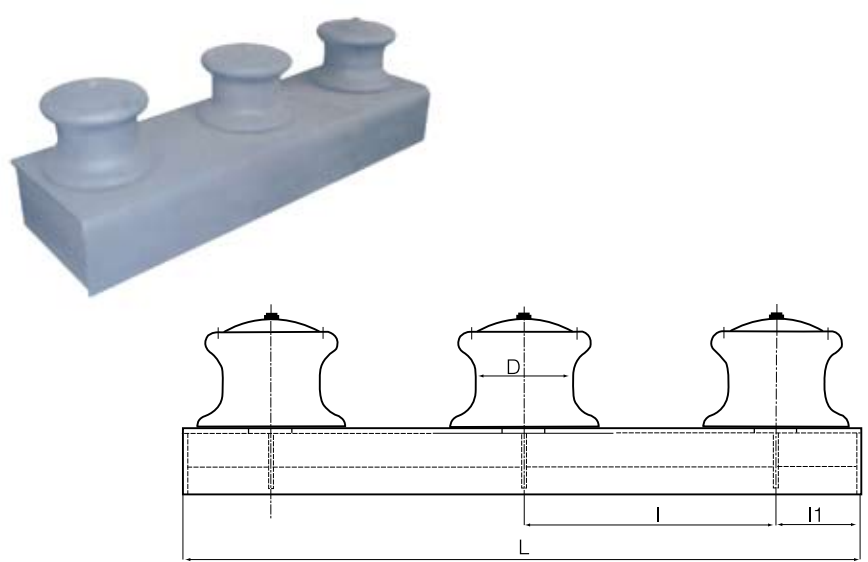


开式三滚轮导缆器
Open type three-roller fairlead

规格Size	D	L	I	I1
150	150	1160	420	160
200	200	1460	530	200
250	250	1740	640	230
300	300	2020	750	260
350	350	2300	860	290
400	400	2580	970	320
450	450	2880	1080	360

导缆滚轮（带座） Guide roller(with stand)

导缆滚轮带座（闭式）
Guide roller with stand(closed type)
JIS F 2014-87

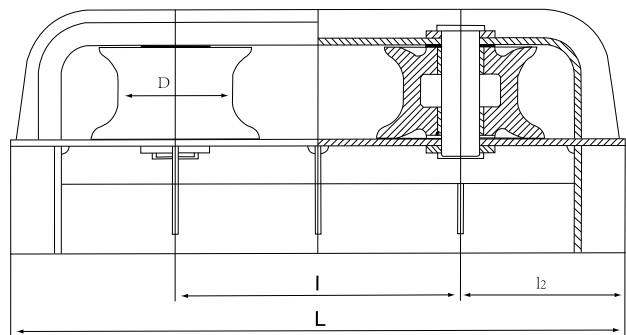


闭式二滚轮导缆器
Closed type two-roller fairlead

规格Size	D	L	l	l2
150	150	1020	420	300
200	200	1190	530	330
250	250	1430	640	395
300	300	1610	750	430
350	350	1890	860	515
400	400	2100	970	565
450	450	2360	1080	640


闭式三滚轮导缆器
Closed type three-roller fairlead

规格Size	D	L	l	l2
150	150	1440	420	300
200	200	1720	530	330
250	250	2070	640	395
300	300	2360	750	430
350	350	2750	860	515
400	400	3070	970	565
450	450	3440	1080	640

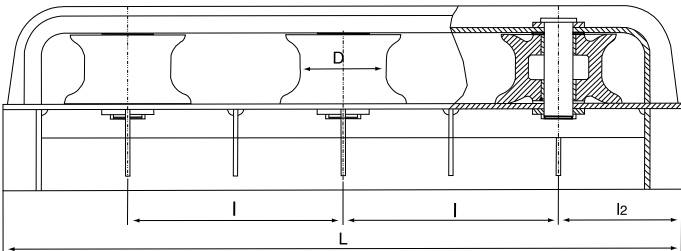


导缆滚轮（带座）Guide roller(with stand)

船用导缆滚轮 Ship' s guide roller
GB/T10105-88 NS 2585




滚轮 直径 Dia. of roller D	适用缆索最大直径（参考） Appropriate cable dia.				外形尺寸 Size				重量 Weight Kg
	钢索GB1102 抗拉强度为15.2Mpa Steel wire strength		麻索 Hemp rope	合成纤维索 Synthetic fiber rope	D1	d0	d7	H	
	6×24	6×37							
150	17.0	15.0	45	32	240	90	79	154	24.8
200	22.5	19.5	55	40	310	115	99	186	49.3
250	24.0	24.0	65	45	380	135	119	230	92.0
300	30.0	28.0	70	50	440	155	129	255	127.0
350	37.5	34.5	75	55	500	175	149	271	168.0
400	41.0	39.0	85	65	560	185	159	307	252.5
450	44.5	43.0	—	80	630	210	179	316	310.0

船用导缆滚轮(带座) Ship' s guide roller (with stand)
GB/T10105-88

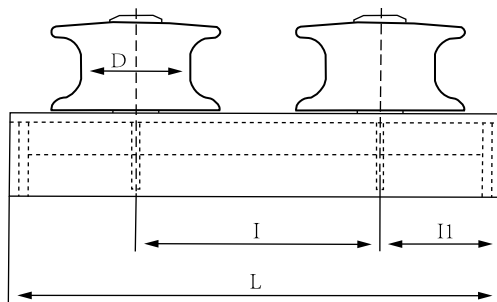

开式二滚轮导缆器
Open type two-roller fairlead

规格Size	D	L	I	I2
150	150	740	420	160
200	200	930	530	200
250	250	1100	640	230
300	300	1270	750	260
350	350	1440	860	290
400	400	1610	970	320
450	450	1800	1080	360

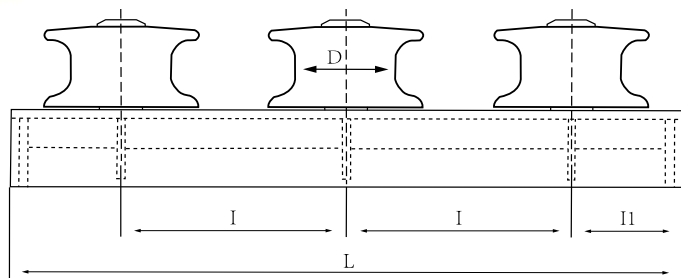


开式三滚轮导缆器
Open type three-roller fairlead

规格Size	D	L	I	I2
150	150	1160	420	160
200	200	1460	530	200
250	250	1740	640	230
300	300	2020	750	260
350	350	2300	860	290
400	400	2580	970	320
450	450	2880	1080	360


导缆滚轮（带座）Guide roller(with stand)

德式滚轮 Warping roller
DIN 81906

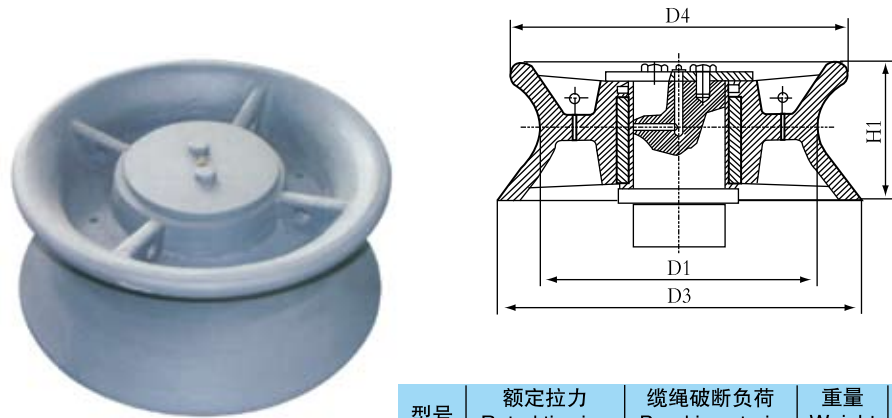

型号 Type	额定拉力 Rated tiowing pull (Kn)	缆绳破断负荷 Breaking strain of rope (Kn)	重量 Weight (Kg)	D1	D3	D4	H1
1	10	90	14	160	210	195	80
2	20	150	20	200	265	245	102
3	30	220	33	250	330	300	126
5	50	350	72	320	420	390	160
8	80	500	140	400	530	490	208
12	120	800	240	450	610	560	256
20	200	1150	320	500	640	620	278
32	320	1750	580	560	780	740	348


韩式滚轮 rollers

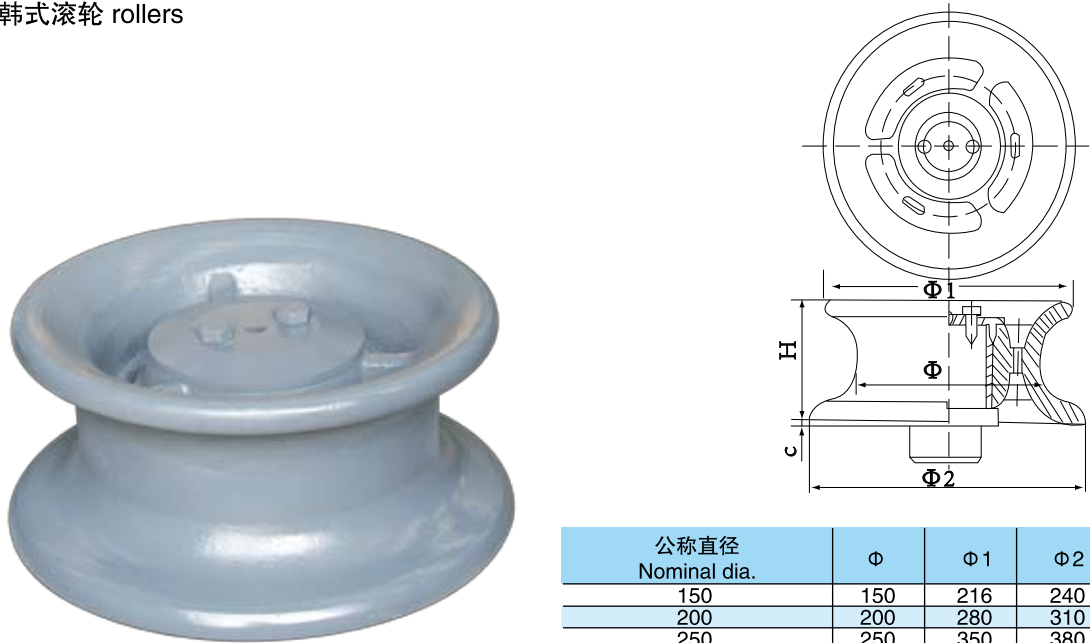

公称直径 Nominal dia.	Φ	Φ1	Φ2	H	C
150	150	216	240	137	5
200	200	280	310	157	5
250	250	350	380	177	6
300	300	400	440	197	7
350	350	460	500	217	7
400	400	520	560	237	7
450	450	590	630	257	7
500	500	660	700	277	7

钢板滚轮 Mooring Equipment

JIS-F2014
CB/T3861-2011

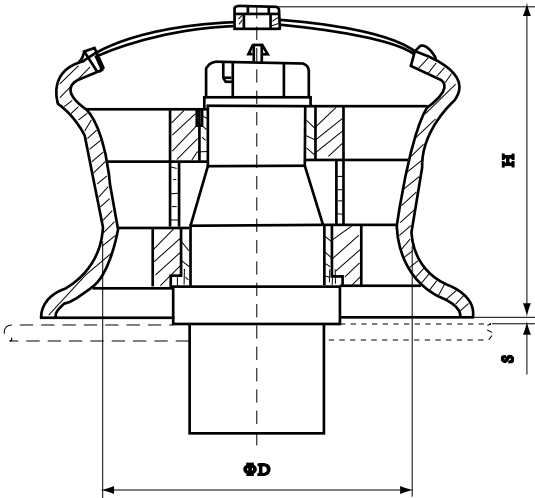

Nomial Size	Roller Shell									Boss								Weight (kg)
	D	D1	D2	t	H	R	R1	R2	R3	S3	D4	D5	T	Rib Q'ty	Set Screw			
															Size	Length	Q'ty	
200	200	310	280	9.5	216	45	40	25	25	146	120	93	12	6	M8	10	4	34.0
250	260	360	340	10.0	245	65	55	28	25	178	152	117	12	6	M8	10	4	58.4
300	316	40	410	11.1	287	70	60	30	28	205	168	148	18	6	M8	10	4	84.3
350	374	500	471	12.7	330	70	65	30	28	232	190	180	21	6	M8	10	4	121.0
400	402	560	524	14.3	360	75	65	45	45	244	205	185	21	6	M8	10	4	162.0
450	445	620	570	15.1	378	90	90	45	45	273	232	212	21	6	M8	10	4	204.0


羊角单滚轮导缆器 Single roller with socket

羊角单滚轮导缆器A型 Single roller with socket type A
CB/T436-2000




滚轮直径 Dia. of roller D	适用缆索最大直径 (参考) Appropriate cable dia.				外形尺寸 Size								重量Weight Kg	
	钢索 (GB/T 8918) 抗拉强度为1570MPa Steel wire strength		麻索 Hemp rope	合成纤维索 Synthetic fiber rope	D1	D4	H	H1	L	S	t	t1	导缆滚轮 Guide roller	基座 Stand
	6 × 24	6 × 37												
100	11.0	11.0	40	28	160	176	128	35	60	3	8	6	9.9	63.9
150	16~18	14~16	45	32	240	264	211	40	75	3	12	8	33.8	129.0
200	22.0	20.0	55	40	310	338	251	50	85	3	14	10	68.0	178.0
250	24.0	24.0	65	45	380	408	298	60	100	4	14	10	114.0	207.0
300	30.0	28.0	70	50	440	472	321	60	100	4	16	14	168.0	265.0
350	38.0	34.0	75	55	500	536	346	65	100	4	18	14	248	332.0
400	40~42	38~40	85	65	560	600	371	70	100	5	20	16	355.0	401.3
450	44.0	42~44	-	80	620	660	394	90	120	5	20	16	452.0	445.4

注：基座重量是指基座高h=1000mm时重量 Note: The weight of stand is calculated when stand's height is 1000mm.

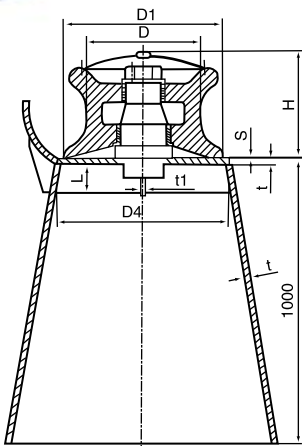

羊角单滚轮导缆器A型
Single roller with socket type A

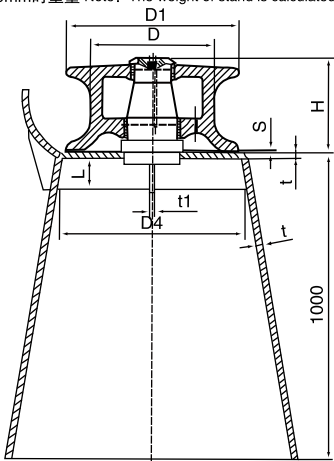

羊角单滚轮导缆器B型
Single roller with socket type B



羊角单滚轮导缆器B型 Single roller with socket type B
CB/T436-2000



滚轮直径 Dia. of roller D	适用缆索最大直径 (参考) Appropriate cable dia.				外形尺寸 Size								重量Weight Kg	
	钢索 (GB/T 8918) 抗拉强度为1570Mpa Steel wire strength		麻索 Hemp rope	合成纤维索 Synthetic fiber rope	D1	D4	H	H1	L	S	t	t1	导缆滚轮 Guide roller	基座 Stand
	6 × 24	6 × 37												
150	16~18	14~16	45	32	240	264	154	30	75	5	12	8	24.8	129.0
200	22.0	20.0	55	40	310	338	186	30	85	5	14	10	49.3	178.0
250	24.0	24.0	65	45	380	408	230	35	100	6	14	10	92.0	207.0
300	30.0	28.0	70	50	440	472	255	35	100	7	16	12	127.0	265.0
350	38.0	34.0	75	55	500	536	271	35	100	7	18	14	168.0	332.0
400	40~42	38~40	85	65	560	600	307	40	100	7	20	16	252.5	401.3
450	44.0	42~44	-	80	630	670	316	40	120	7	20	16	310.0	452.0

注：基座重量是指基座高h=1000mm时重量 Note: The weight of stand is calculated when stand's height is 1000mm.

羊角单滚轮导缆器 Single roller with socket

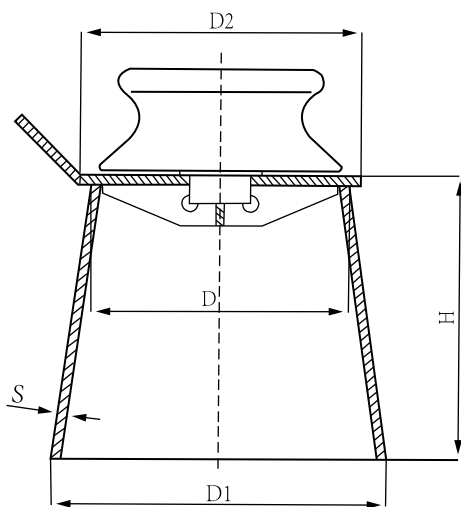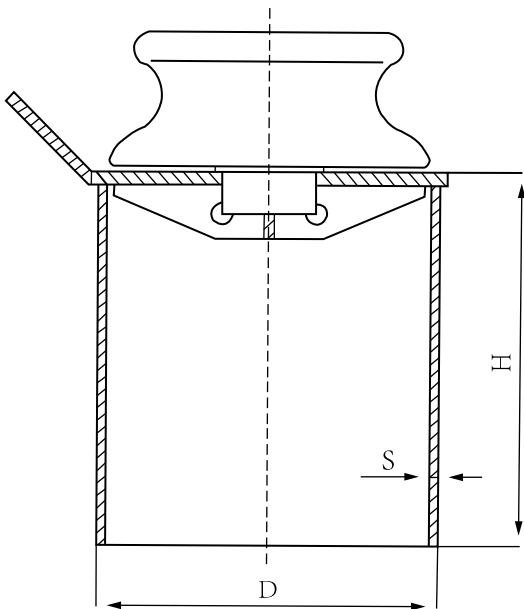

德式滚轮导缆器A型

Warping roller with pedestal type A

DIN 81907

型号 Type	H	管筒尺寸TUBE D×S	重量 (Kg) Weight
3	200	355.6 × 12.5	68
3	400	355.6 × 12.5	89
3	600	355.6 × 12.5	111
3	800	355.6 × 12.5	132
5	200	457.2 × 12.5	117
5	400	457.2 × 12.5	144
5	600	457.2 × 12.5	172
5	800	457.2 × 12.5	199
8	200	558.8 × 12.5	209
8	400	558.8 × 12.5	242
8	600	558.8 × 12.5	276
8	800	558.8 × 12.5	310
12	200	660.4 × 14.2	325
12	400	660.4 × 14.2	370
12	600	660.4 × 14.2	415
12	800	660.4 × 14.2	460
20	200	660.4 × 17.5	460
20	400	660.4 × 17.5	516
20	600	660.4 × 17.5	571
32	200	812.8 × 16	748
32	400	812.8 × 16	810
32	600	812.8 × 16	873

德式滚轮导缆器B型


Warping roller with pedestal type B

DIN 81907

型号 Type	H	D	D1	S	D2	C	重量 (Kg) Weight
8	1000	550	815	15	575	80	426
12	1000	630	895	15	655	80	568
12	1200	630	945	15	655	80	638
20	800	660	870	15	685	100	629
20	1000	660	925	15	685	100	695
20	1200	660	975	15	685	100	764
20	1400	660	1025	15	685	100	838
32	800	800	1010	15	825	100	953
32	1000	800	1065	15	825	100	1030
32	1200	800	1115	15	825	100	1110
32	1400	800	1165	15	825	100	1196

滚柱导缆器 Roller fairlead




三滚柱导缆器-A Three-roller fairlead-Type A
CB*3062-79

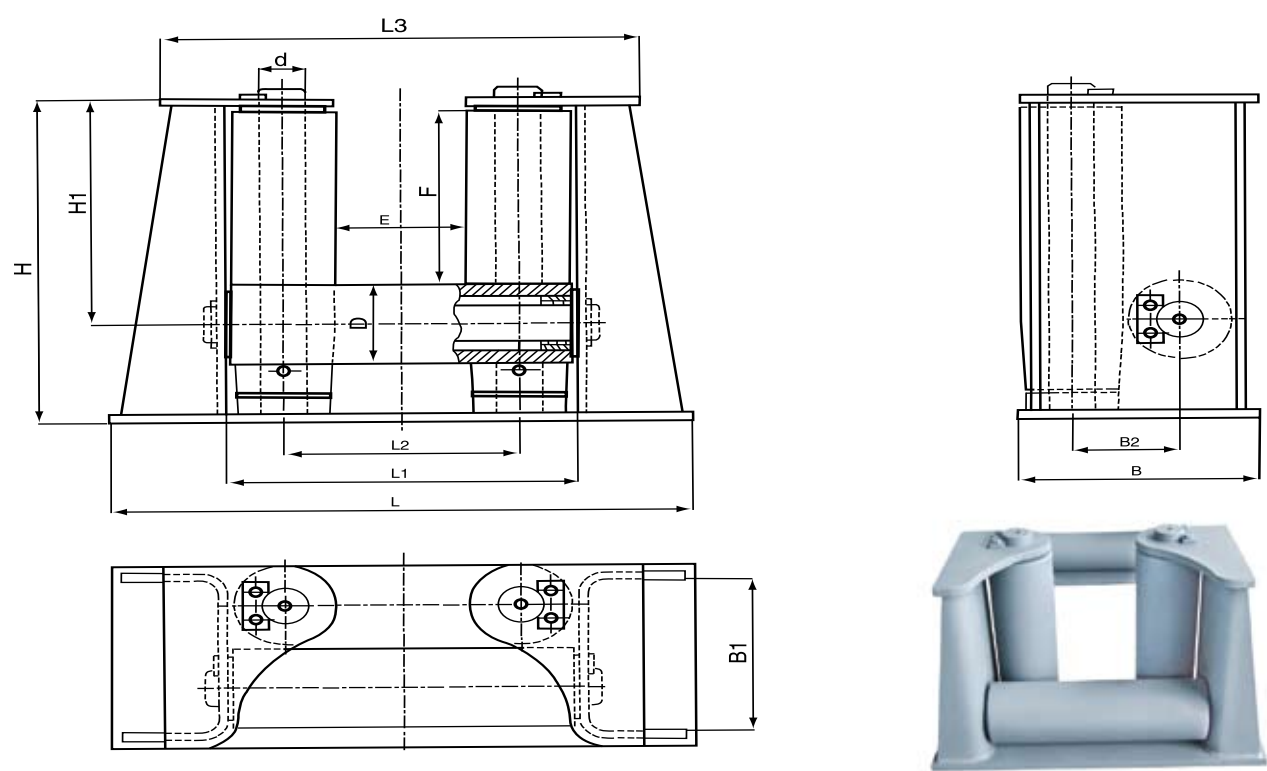

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	257	100	40-0.5	644	416	300	544	238	194	108	508	330	138
22.5	40	200	275	120	50-0.5	728	456	320	608	280	232	128	552	360	212
26.0	45	200	311	130	55-0.5	776	480	330	646	304	250	138	606	405	273
32.0	70	220	328	150	65-0.5	880	540	370	730	346	288	158	670	435	401
34.5	80	240	358	160	70-0.5	940	580	400	780	370	308	168	710	470	469
37.5	85	240	383	180	80-0.5	1030	620	420	850	417	345	190	770	510	678
43.0	95	260	411	200	90-0.5	1136	686	460	936	459	385	210	820	550	866
52.0	100	260	450	230	100-0.5	1256	746	490	1026	521	445	240	910	605	1197
60.5	-	300	493	260	120-0.5	1430	850	560	1170	590	500	270	1000	670	1741
68.0	-	320	563	320	150-0.5	1690	990	640	1370	714	620	330	1130	770	2811

滚柱导缆器 Roller fairlead



四滚柱导缆器-BA Four-roller fairlead-Type BA
CB*3062-79

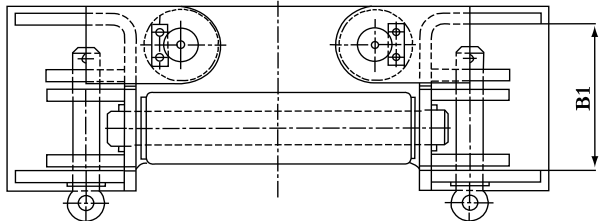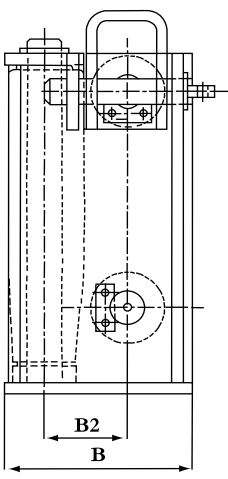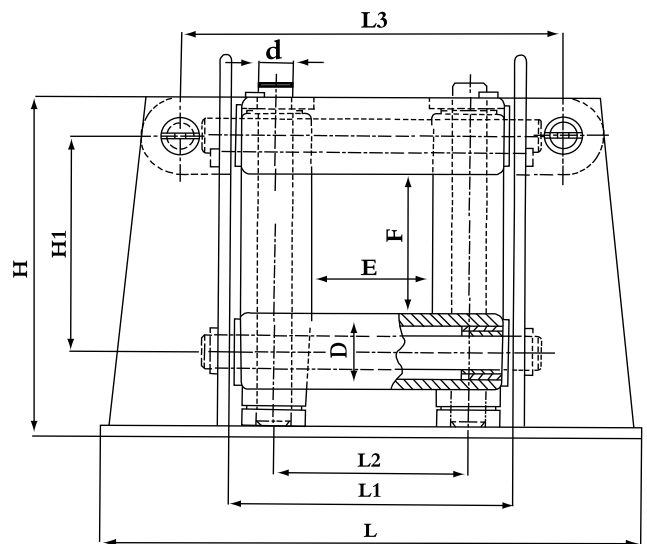

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	194	100	40-0.5	744	416	300	544	238	194	108	508	294	173
22.5	40	200	196	120	50-0.5	848	456	320	608	280	232	128	552	316	264
26.0	45	200	228	130	55-0.5	906	480	330	646	304	250	138	606	358	337
32.0	70	220	230	150	65-0.5	1030	540	370	730	346	288	158	670	380	485
34.5	80	240	250	160	70-0.5	1100	580	400	780	370	308	168	710	410	583
37.5	85	240	265	180	80-0.5	1210	620	420	850	417	345	190	770	445	823
43.0	95	260	275	200	90-0.5	1336	686	460	936	459	385	210	820	475	1064

滚柱导缆器 Roller fairlead


四滚柱导缆器-BB Four-roller fairlead-Type BB
CB*3062-79

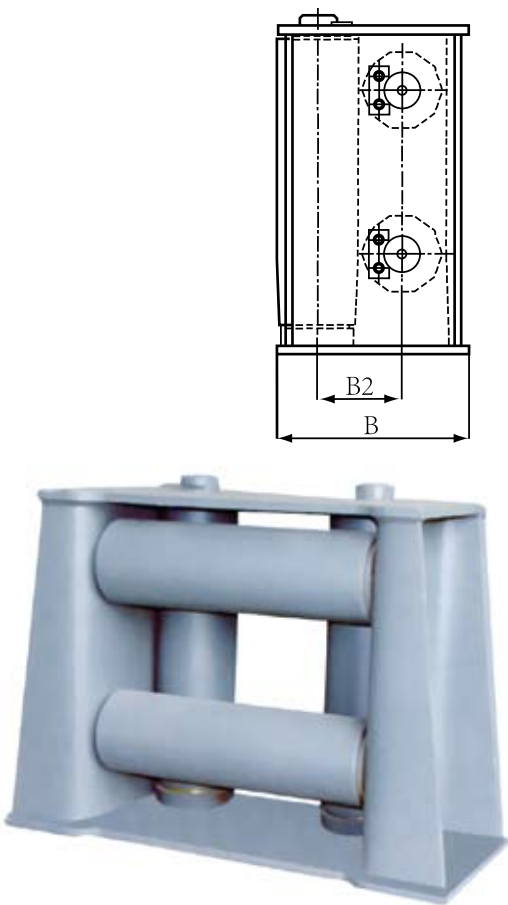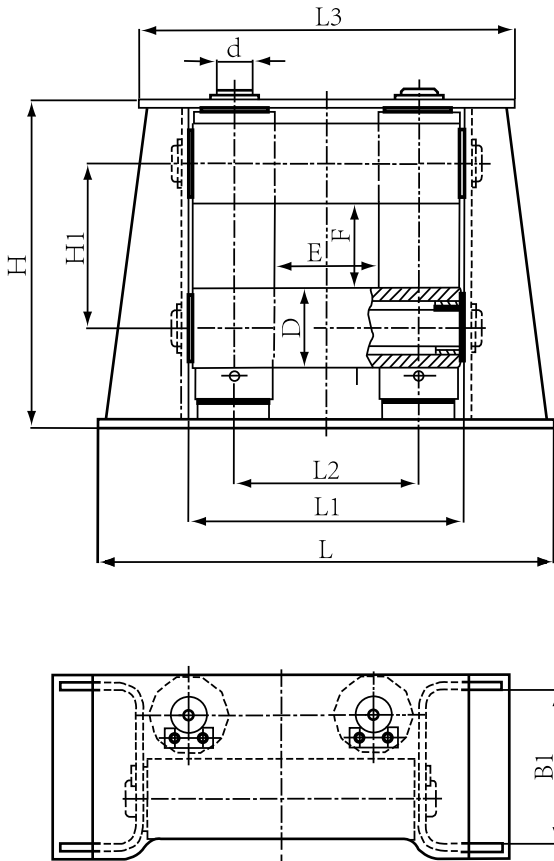

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	150	100	40-0.5	644	416	300	544	238	194	108	508	250	155
22.5	40	200	150	120	50-0.5	728	456	320	608	280	232	128	552	270	239
26.0	45	200	180	130	55-0.5	776	480	330	646	304	250	138	606	310	306
32.0	70	220	180	150	65-0.5	880	540	370	730	346	288	158	670	330	450
34.5	80	240	200	160	70-0.5	940	580	400	780	370	308	168	710	360	576
37.5	85	240	200	180	80-0.5	1030	620	420	850	417	345	190	770	380	756
43.0	95	260	210	200	90-0.5	1136	686	460	936	459	385	210	820	410	987
52.0	100	260	220	230	100-0.5	1256	746	490	1026	521	445	240	910	450	1370
60.5	-	300	240	260	120-0.5	1430	850	560	1170	590	500	270	1000	500	2008
68.0	-	320	250	320	150-0.5	1690	990	640	1370	714	620	330	1130	570	3352

滚柱导缆器 Roller fairlead



五滚柱导缆器-C Five-roller fairlead-Type C
CB*3062-79

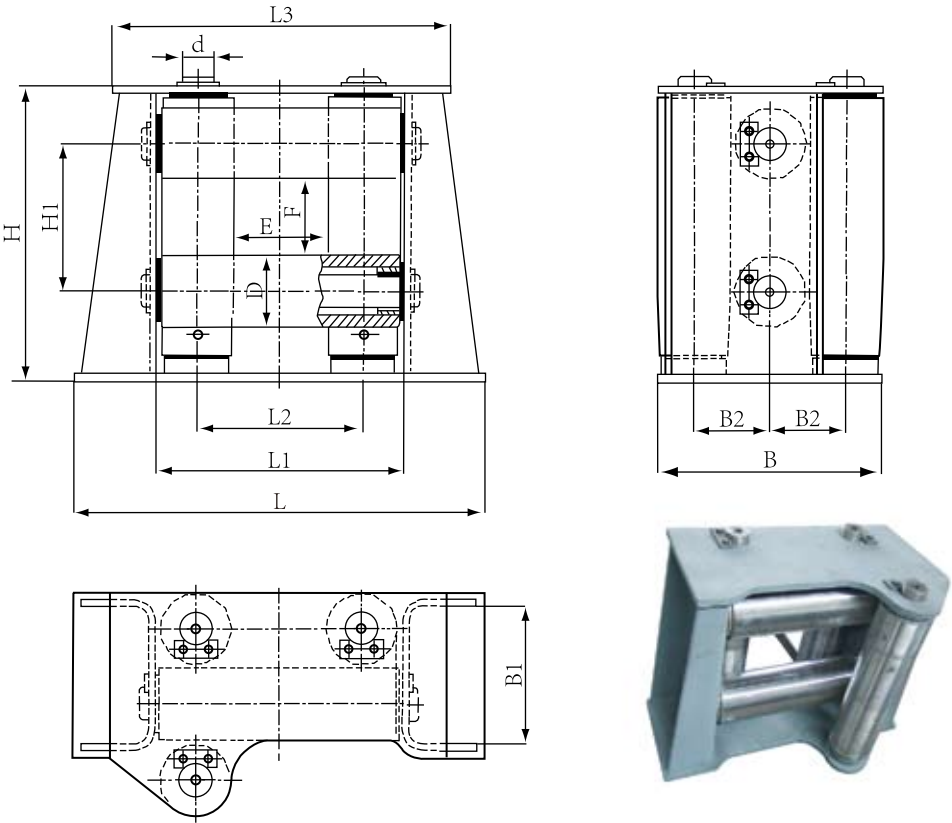

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	150	100	40-0.5	644	416	300	544	324	194	108	508	250	182
22.5	40	200	150	120	50-0.5	728	456	320	608	384	232	128	552	270	282
26.0	45	200	180	130	55-0.5	776	480	330	646	415	250	138	606	310	360
32.0	70	220	180	150	65-0.5	880	540	370	730	475	288	158	670	330	532
34.5	80	240	200	160	70-0.5	940	580	400	780	507	308	168	710	360	675
37.5	85	240	200	180	80-0.5	1030	620	420	850	571	345	190	770	380	895
43.0	95	260	210	200	90-0.5	1136	686	460	936	632	385	210	820	410	1169
52.0	100	260	220	230	100-0.5	1256	746	490	1026	723	445	240	910	450	1636
60.5	-	300	240	260	120-0.5	1430	850	560	1170	815	500	270	1000	500	2384
68.0	-	320	250	320	150-0.5	1690	990	640	1370	997	620	330	1130	570	4021

滚柱导缆器 Roller fairlead




七滚柱导缆器-D Seven-roller fairlead-Type D
CB*3062-79

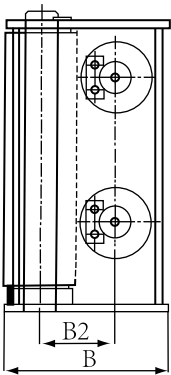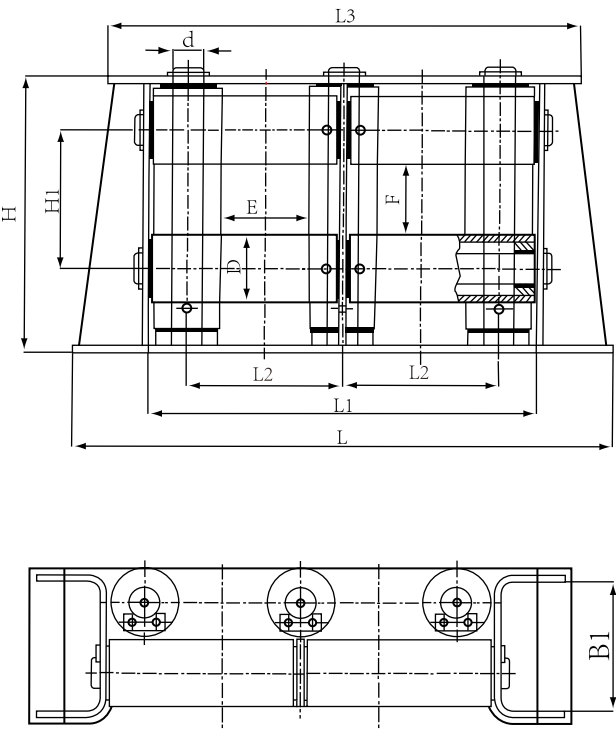

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	150	100	40-0.5	944	716	300	844	238	194	108	508	250	247
22.5	40	200	150	120	50-0.5	1048	776	320	928	280	232	128	552	270	377
26.0	45	200	180	130	55-0.5	1106	810	330	976	304	250	138	606	310	485
32.0	70	220	180	150	65-0.5	1250	910	370	1100	346	288	158	670	330	716
34.5	80	240	200	160	70-0.5	1340	980	400	1180	370	308	168	710	360	849
37.5	85	240	200	180	80-0.5	1450	1040	420	1270	417	345	190	770	380	951
43.0	95	260	210	200	90-0.5	1596	1146	460	1396	459	385	210	820	410	1546
52.0	100	260	220	230	100-0.5	1746	1236	490	1516	521	445	240	910	450	2143
60.5	-	300	240	260	120-0.5	1990	1410	560	1730	590	500	270	1000	500	3134
68.0	-	320	250	320	150-0.5	2330	1630	640	2010	714	620	330	1130	570	5100

滚柱导缆器 Roller fairlead


九滚柱导缆器-E Nine-roller fairlead-Type E
CB*3062-79

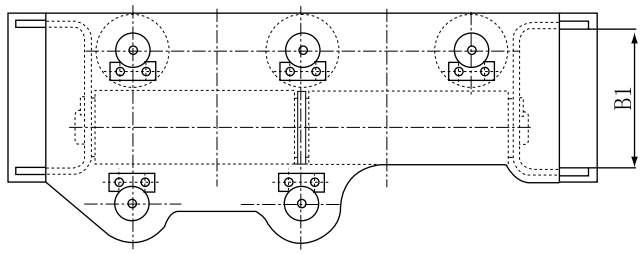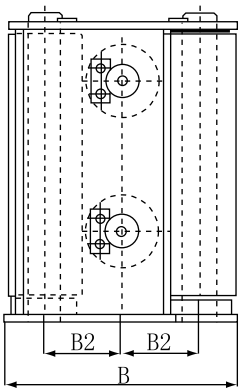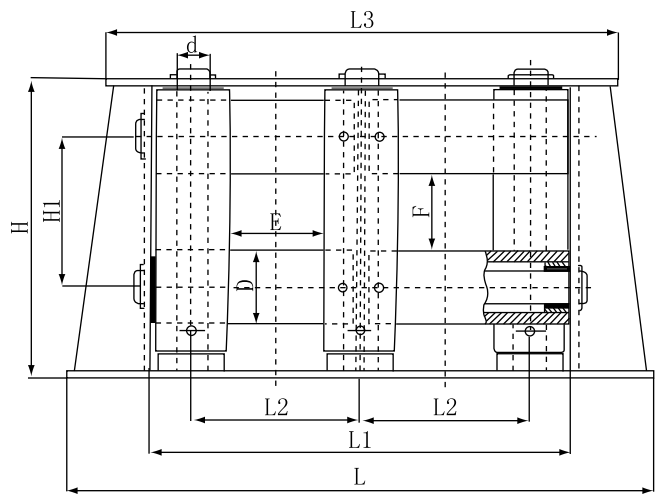

钢索直径 Steel wire dia.	尼龙绳直径 Nylon wire dia.	E	F	D	d	L	L1	L2	L3	B	B1	B2	H	H1	重量 Weight kg
19.5	36	200	150	100	40-0.5	944	716	300	844	324	194	108	508	250	302
22.5	40	200	150	120	50-0.5	1048	776	320	928	384	232	128	552	270	464
26.0	45	200	180	130	55-0.5	1106	810	330	976	415	250	138	606	310	596
32.0	70	220	180	150	65-0.5	1250	910	370	1100	475	288	158	670	330	883
34.5	80	240	200	160	70-0.5	1340	980	400	1180	507	308	168	710	360	1048
37.5	85	240	200	180	80-0.5	1450	1040	420	1270	571	345	190	770	380	1229
43.0	95	260	210	200	90-0.5	1596	1146	460	1396	632	385	210	820	410	1911
52.0	100	260	220	230	100-0.5	1746	1236	490	1516	723	445	240	910	450	2675
60.5	-	300	240	260	120-0.5	1990	1410	560	1730	815	500	270	1000	500	3887
68.0	-	320	250	320	150-0.5	2330	1630	640	2010	997	620	330	1130	570	6432

滚柱导缆器 Roller fairlead

日式五滚柱导缆器-BR型 Japanese standard five-roller fairlead-Type BR
JIS F 2026-80

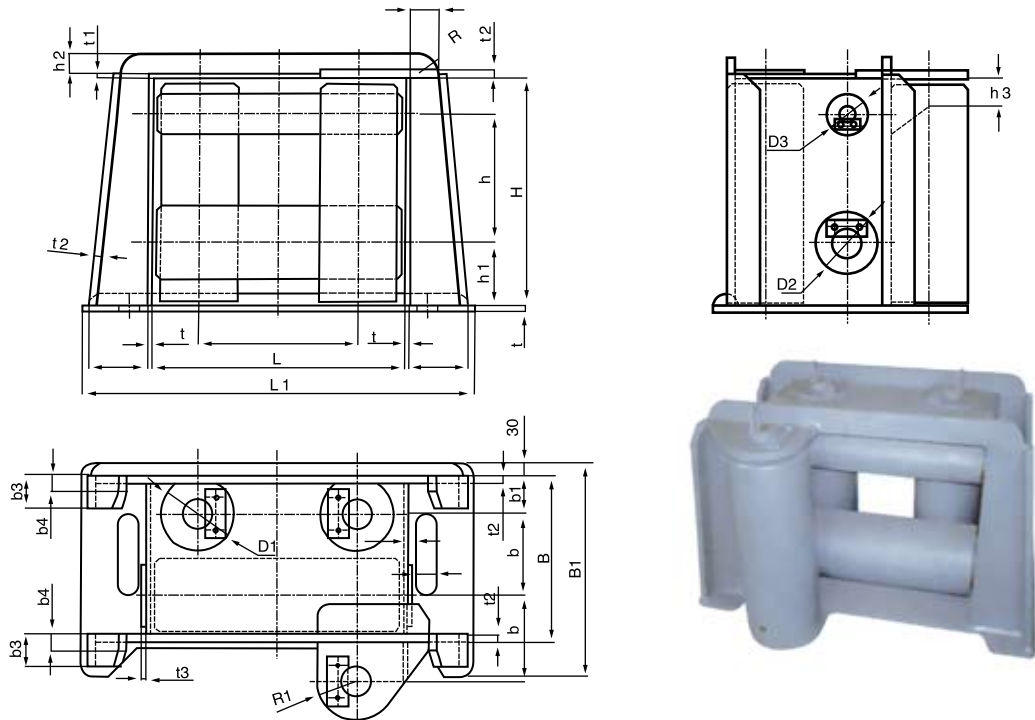


公称直径 Nominal dia.	结构 Frame																	
	B	B1	b	b1	b2	b3	b4	D	D1	D2	D3	H	h	h1	h2	h3	L	L1
140	310	355	150	69	20	45	25	90	140	120	80	480	275	130	40	50	515	805
160	360	405	175	82	22	65	35	110	160	140	90	515	290	145	45	60	570	890
180	410	455	200	95	24	80	40	135	180	150	100	560	315	155	50	70	620	960
200	460	505	225	108	26	90	45	160	200	160	110	590	330	170	60	80	675	1049
250	565	610	280	133	30	105	55	200	250	200	130	715	415	195	75	90	825	1303
315	670	715	330	159	34	125	65	240	300	240	160	870	520	220	90	100	980	1562

公称直径 Nominal dia.	结构 Frame												焊角 Leg of weld				重量 Weight kg
	l	l1	l2	l3	l4	R	R1	t	t1	t2	t3	t4	f	f1	f2	f3	
140	335	120	60	50	20	40	70	12	10	16	6	20	9	6	12	4	235
160	365	135	65	50	20	45	85	14	10	18	8	22	9	7	12	6	353
180	390	145	70	50	20	50	95	16	10	20	10	24	9	9	12	8	496
200	420	160	80	50	20	60	110	18	123	22	10	26	10	10	14	8	648
250	520	210	105	60	25	75	135	20	14	26	12	30	10	12	14	10	1176
315	620	260	130	60	25	90	160	22	16	30	14	34	12	14	16	10	2050

注：估地包括滚 柱和轴。Remark:Calculated mass includes weights of roller and axle.

滚柱导缆器 Roller fairlead


德式四滚柱导缆器 German standard four-roller fairlead

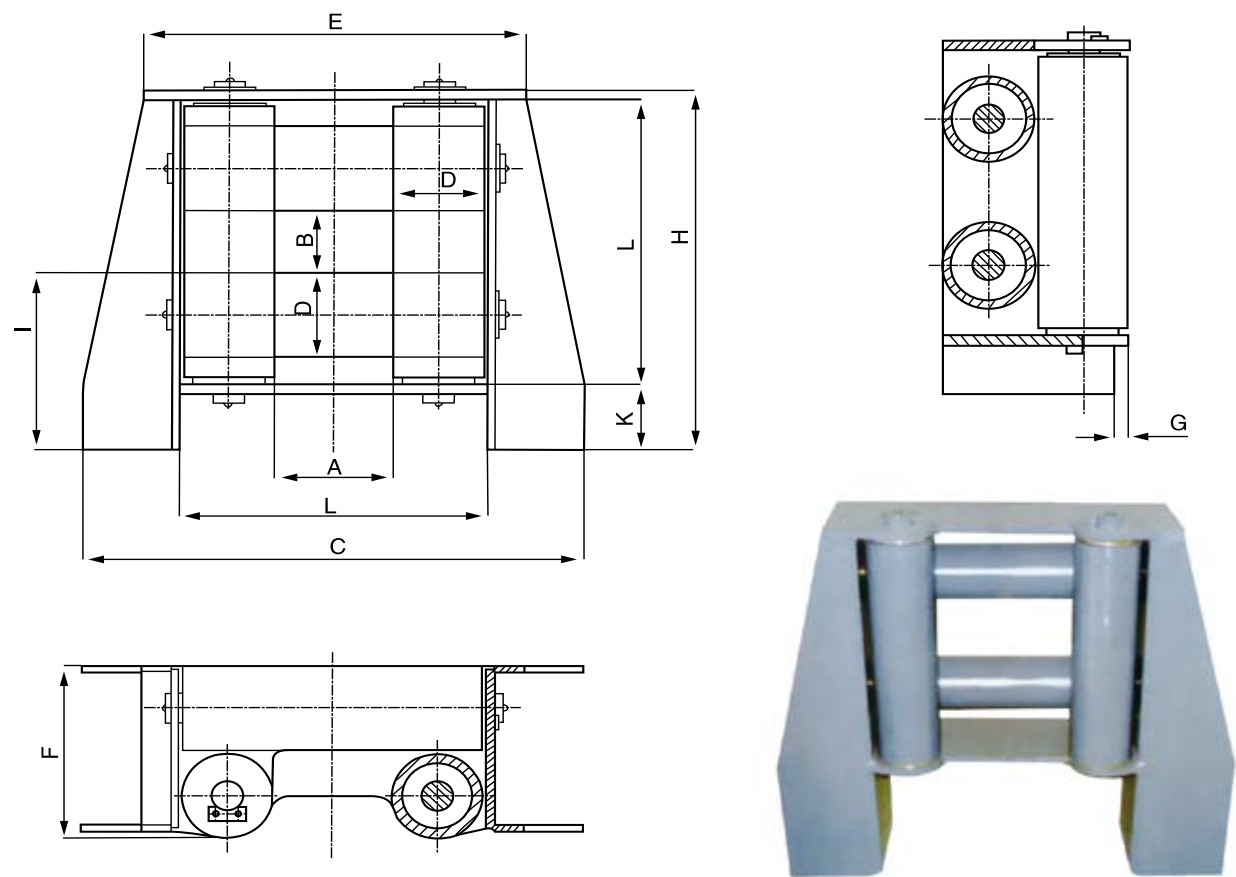

型号 Type	缆绳直径 Wire Φ	A	B	C	D	E	F	G	H	I	K	L	重量 (kg) Weight
CF 2	-12	180	100	650	80	446	170	10	465	208	80	356	75
CF 3	-16	230	130	800	100	546	210	10	575	258	100	446	130
CF 5	-20	250	130	900	120	626	250	15	655	308	120	506	220
CF 8	-24	280	160	1000	140	716	290	20	730	328	120	576	330
CF 12	-32	300	160	1200	180	836	366	25	855	398	140	676	580
CF 20	-40	320	180	1350	245	1030	500	35	1045	505	180	830	1100
CF 32	-48	400	250	1700	300	1236	610	45	1260	583	200	1016	2210

滚柱导缆器 Roller fairlead


德式五、六滚柱导缆器 German standard five or six-roller fairlead

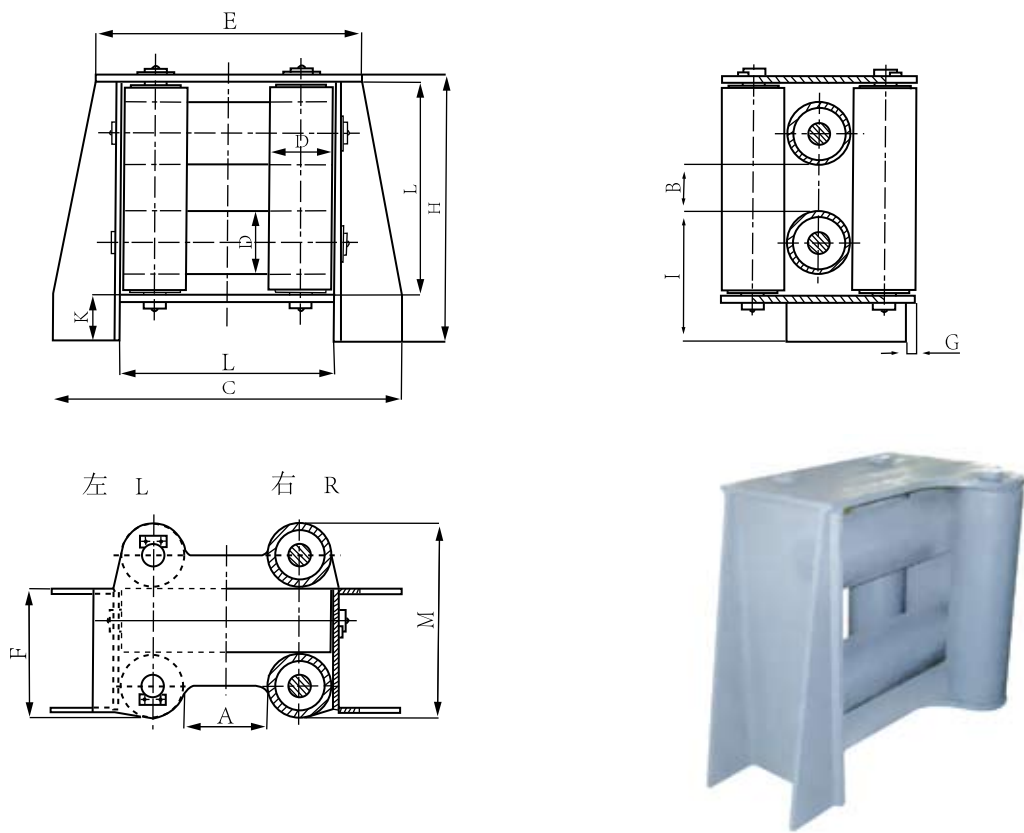

型号 Type	缆绳直径 Wire Φ	A	B	C	D	E	F	G	H	I	K	L	M	重量 (kg) Weight	
														1	2
CFL 2 CFR 2 CFA 2	—12	180	100	650	80	446	170	10	465	208	80	356	255	85	95
CFL 3 CFR 3 CFA 3	—16	230	130	800	100	546	210	10	575	258	100	446	315	145	165
CFL 5 CFR 5 CFA 5	—20	250	130	900	120	626	250	15	655	308	120	506	375	255	290
CFL 8 CFR 8 CFA 8	—24	280	160	1000	140	716	288	20	730	328	120	576	432	390	440
CFL 12 CFR 12 CFA 12	—32	300	160	1200	180	836	366	25	855	398	140	676	549	665	750
CFL 20 CFR 20 CFA 20	—40	320	180	1350	245	1030	500	35	1045	505	180	830	750	1300	1450
CFL 32 CFR 32 CFA 32	—48	400	250	1700	300	1236	608	45	1260	583	200	1016	912	2400	2700

滚柱导缆器 Roller fairlead


德式五滚柱导缆器 German standard five-roller fairlead

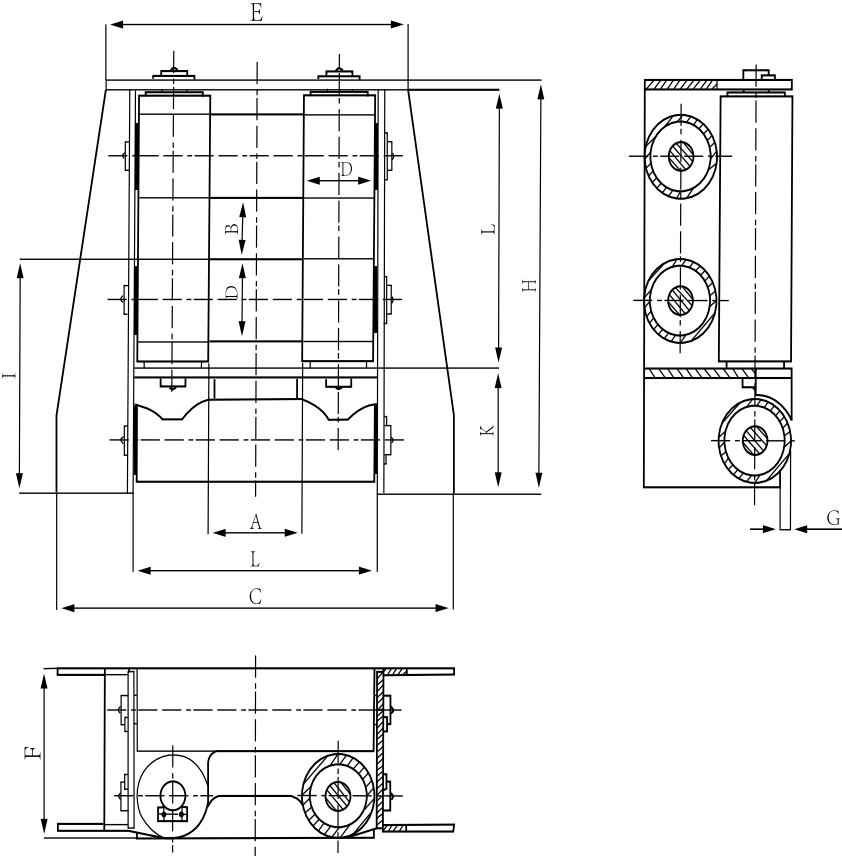

型号 Type	缆绳直径 Wire Φ	A	B	C	D	E	F	G	H	I	K	L	重量 (kg) Weight
CFG 2	–12	180	100	650	80	446	170	10	465	253	125	356	90
CFG 3	–16	230	130	800	100	546	210	10	575	308	150	446	160
CFG 5	–20	250	130	900	120	626	250	15	655	363	175	506	280
CFG 8	–24	280	160	1000	140	716	290	20	730	423	215	576	394
CFG 12	–32	300	160	1200	180	836	366	25	855	518	260	676	860
CFG 20	–40	320	180	1350	245	1030	500	35	1045	660	335	830	1500
CFG 32	–48	400	250	1700	300	1236	610	45	1260	788	405	1016	2550

滚柱导缆器 Roller fairlead


德式七滚柱导缆器 German standard seven-roller fairlead

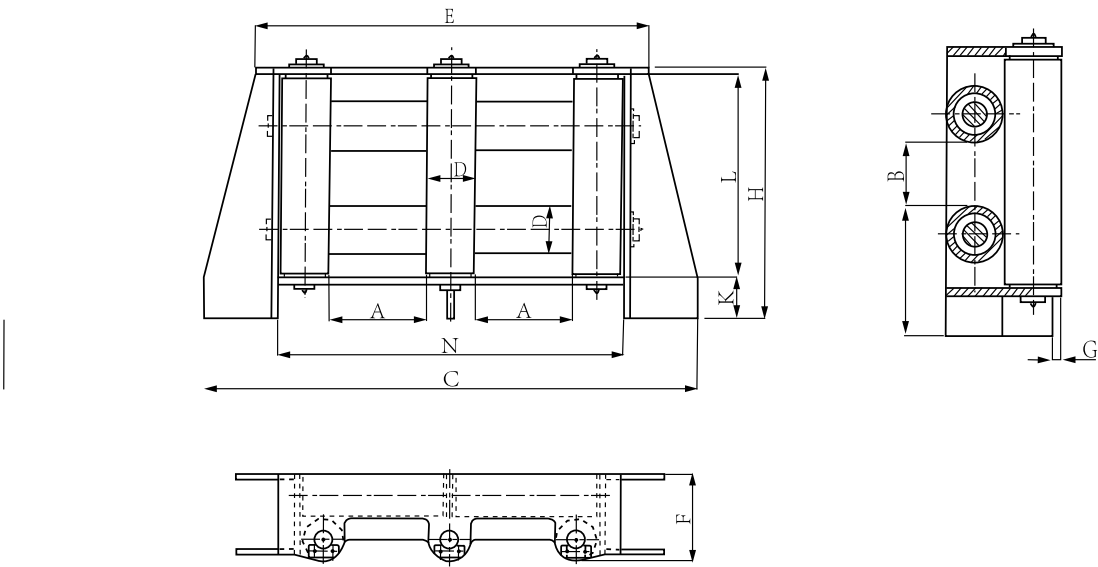

型号 Type	缆绳直径 Wire Φ	A	B	C	D	E	F	G	H	I	K	L	N	重量 (kg) Weight
CDF 2	–12	180	100	914	80	710	170	10	465	208	80	356	620	135
CDF 3	–16	230	130	914	80	878	210	10	575	258	100	446	620	200
CDF 5	–20	250	130	1132	120	998	250	15	655	308	120	506	878	340
CDF 8	–24	280	160	1420	140	1136	288	20	730	328	120	576	996	457
CDF 12	–32	300	160	1678	180	1314	366	25	855	398	140	676	1154	940
CDF 20	–40	320	180	1916	245	1596	500	35	1045	505	180	830	1396	1650
CDF 32	–48	400	250	2400	300	1936	608	45	1260	583	200	1016	1716	3600

滚柱导缆器 Roller fairlead

圣劳伦斯导缆器 St.Lawrence fairlead
CB/T3139-2000

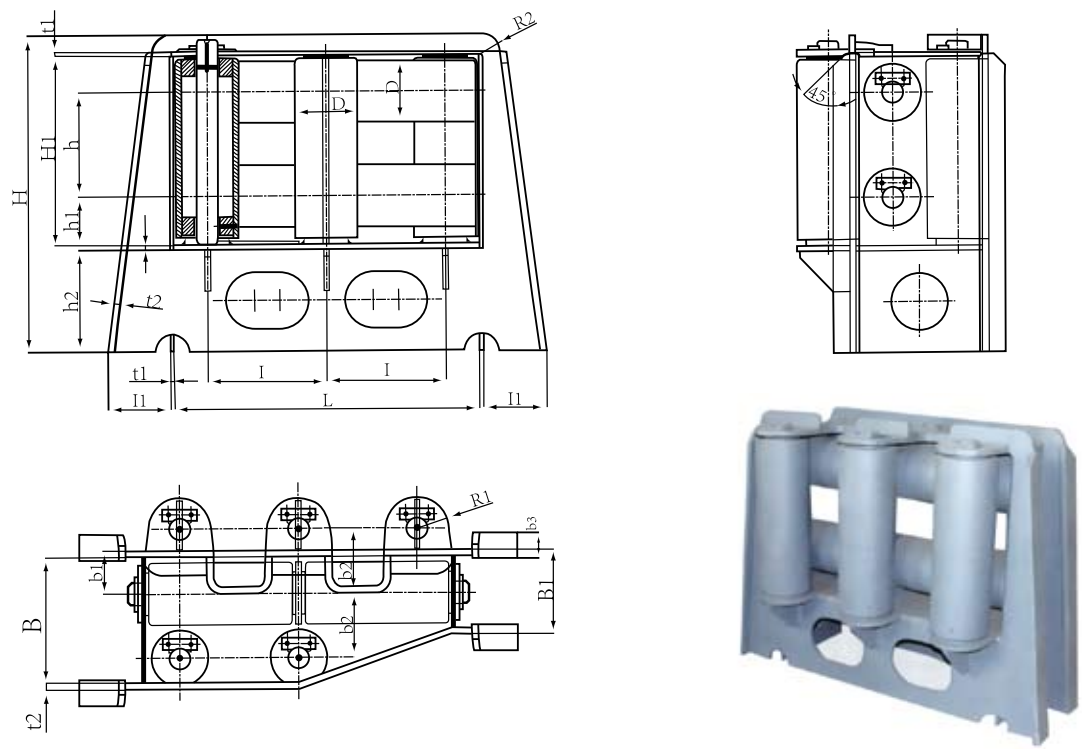


滚柱公称直径 Nominal dia. of roller	缆索直径 Wire dia.		D	L	I	I1	H	H1	h	h1	h2
	钢索 Steed wire (6 × 37 – 155)	合成纤维素 Synthetic fiber rope									
140	18.5	40	140	826	335	140	810	508	290	125	240
160	22.5	50	168	920	368	155	937	578	318	150	290
190	28.0	65	194	1002	394	185	1040	624	344	160	340
200	33.5	80	219	1077	419	200	1119	669	369	170	360


滚柱公称直径 Nominal dia. of roller	B	B1	b1	b2	b3	R1	R2	t	t1	t2	重量 Weight kg
140	275	145	75	150	45	90	40	12	10	16	480
160	340	200	100	178	65	110	45	14	10	18	750
190	395	230	120	205	80	120	50	16	10	20	1000
200	445	255	130	228	90	130	60	18	12	22	1400

滚柱导缆器 Roller fairlead

工程船导缆器 A型
Engineering ship' s fairlead Type A
CB*3015-83

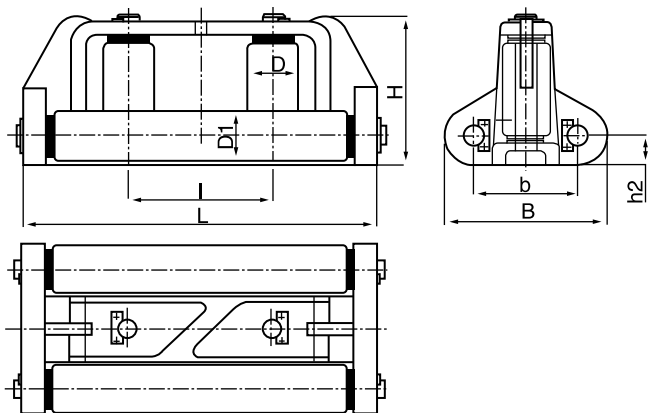

工程船导缆器 B型
Engineering ship' s fairlead Type B
CB*3015-83


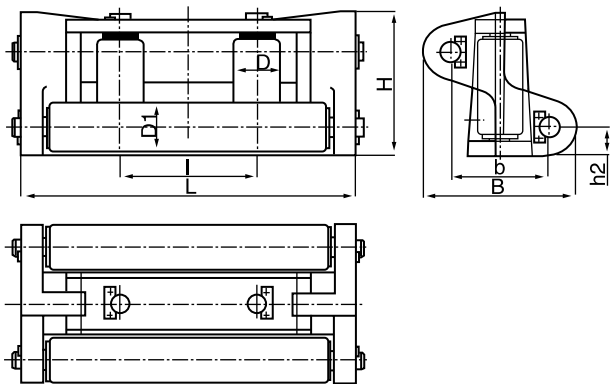


滚筒直径 Roller dia. D	水平滚筒直径 Horizontal roller dia. D1	适用钢索直径 Suitable steel wire dia. Φ	L	B	H		b	h1	h2	I	螺孔直径 Screw hole dia. d
					A型 A Type	B型 B Type					
100	85	19.5	540	340	240	240	250	220	50	200	22
150	120	26.0	760	460	340	340	340	320	65	290	26
200	150	37.5	980	580	430	440	430	410	80	380	32
250	200	48.5	1220	740	520	550	540	500	110	480	39
300	250	56.0	1460	900	620	675	650	590	135	580	39

360° 旋转导缆器 Revolving fairlead

万向滚轮导缆器 Universal fairlead chain wheel

YS-471

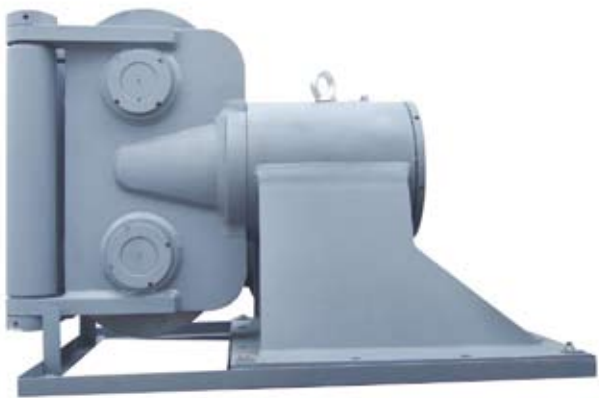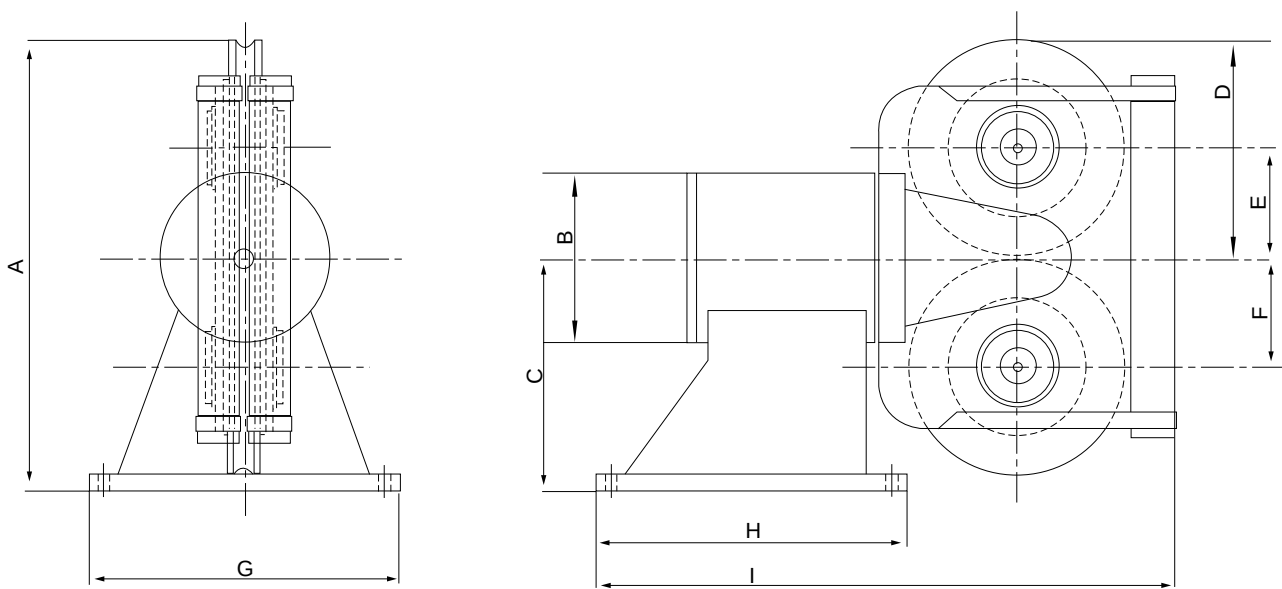

Wire Size		Dimensions (mm)									Weight (kg)
(mm)	(Inch)	A	B	C	D	E	F	G	H	I	
25	1	531	100	275	127	129	129	365	365	679	245
32	1 1/4	667	127	365	150	153	153	660	508	920	555
38	1 1/2	867	178	459	205	205	205	760	760	1.280	1.808
44	1 3/4	1.111	229	600	254	257	257	1.016	914	1.568	2.260
50	2	1.262	265	650	307	307	307	1.20	1.068	1.810	2.950
57	2 1/4	1.433	290	750	340	343	343	1.320	1.220	2.110	4.200
64	2 1/2	1.564	320	800	381	383	383	1.422	1.372	2.252	5636

水平导缆器 Horizontal Sheave Fairlead

DECK SHEAVE FAIRLEAD – MODEL: BD – 46(HORIZONTAL TYPE)

Product Code :AE3500

Wire Size		Sheave Dia D(mm)	Dimensions(mm)			SWL (KN)	Mass (Kgs)
(mm)	(Inch)		A	A	A		
25	1	406	635	635	71	234	176
32	1-1/4	508	780	780	85	355	270
38	1-1/2	610	914	914	100	500	425
45	1-3/4	660	845	845	110	671	560
52	2	762	1143	1143	120	935	890
64	2-1/2	914	1130	1130	130	1414	1300

Remark:1.Build to withstand breaking stength of indicated rope at 90°


2.Wrap angle 90° –180°

3. Sealed roller bearing

4.option :a.with Load pin (Exd Proof)

b.with Horizontal Roller.

5.For off shore Purpose

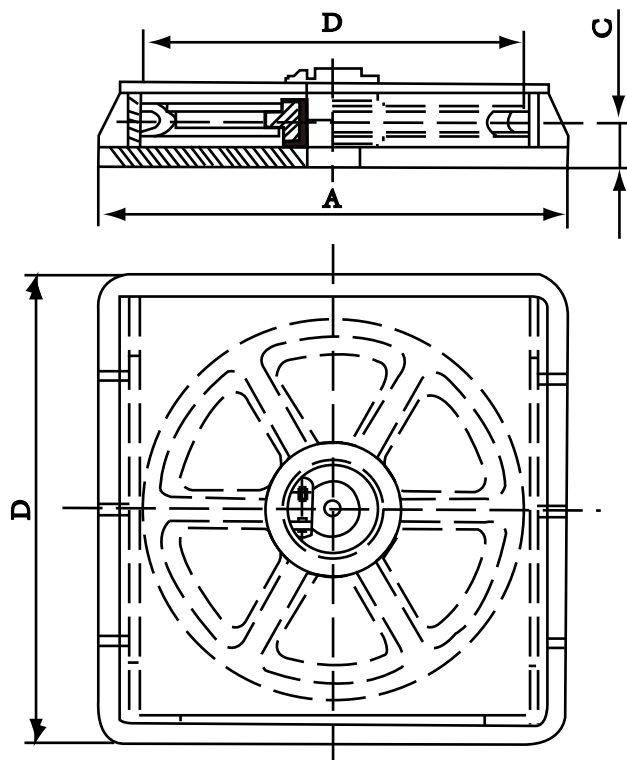


垂直导缆器 Vertical Sheave Fairlead

DECK SHEAVE FAIRLEAD-MODEL:BD-24(VERTICAL TYPE)
Product Code: AE-3515

Wire Size		Sheave Dia D(mm)	Dimensions(mm)					SWL (KN)	Mass (kgs)
(mm)	(Inch)		A	B	C	E	F		
25	1	406	460	270	528	258	20	234	198
32	1-1/4	508	550	310	643	323	25	355	240
38	1-1/2	600	711	407	781	381	30	500	300
45	1-3/4	660	700	416	820	420	30	671	430
52	2	762	903	517	890	432	40	935	680
34	2-1/2	914	940	560	1120	580	40	1414	1050

Remark: Build to withstand bresking strength of indicated rope at 90° sheave wrap on sheave.

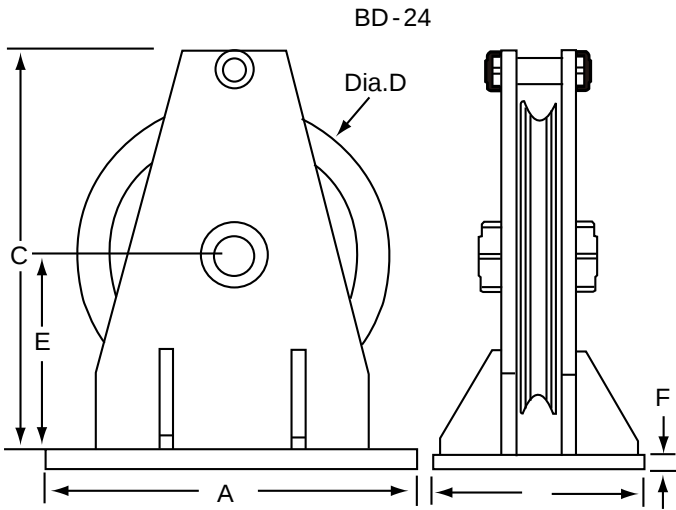

非标导缆器 Non standard fairlead

