


DECK MACHINERY

MARINE CHOCK



导缆钳 Fairlead chock


导缆钳 B型 Fairlead chock Type-B
 GB/T38-99

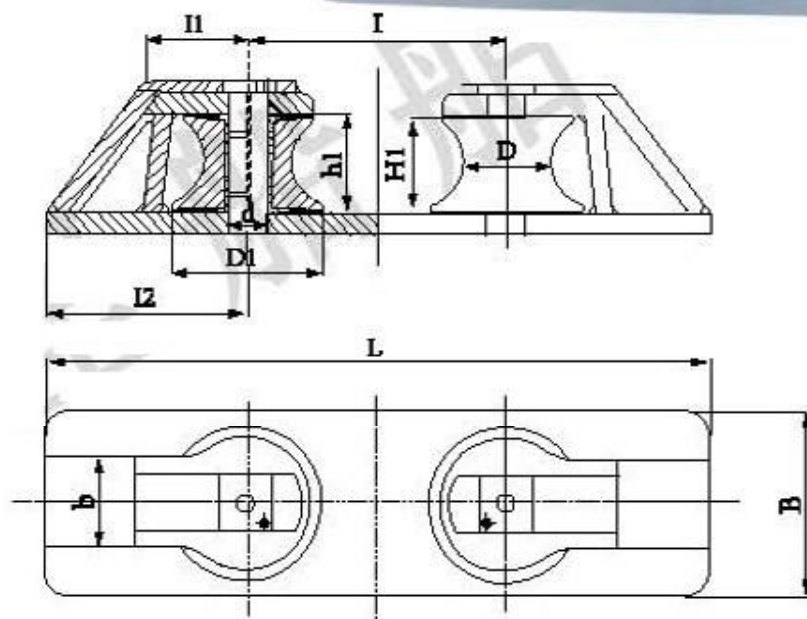

导缆钳 Fairlead chock

B型导缆钳主要尺寸 Type B Fairlead chock Dimensions

公称尺寸 Nominal size	适用缆索最大破断负荷 Chain's MBL (kN)	适用缆索最大直径 Max.dia.of chain			本体 Body							滚 轮 轴 Roller			滚轮轴 Roller code d	重量 Weight kg
		钢索 Steel wire		合成纤维索 Synthetic fiber rope	L	B	I	I1	I2	b	h1	D	D1	H1		
		6×24	6×37													
75	23.3	7.4	—	12	400	150	150	80	125	75	70	75	120	64	22	18
100	62.5	11	—	18	630	200	200	106	166	100	92	100	160	86	32	41
125	93.4	15	—	24	650	250	250	128	200	125	108	125	200	102	40	76
150	145.8	18.5	—	30	780	300	300	150	240	150	128	150	240	120	50	132
200	246.6	24	—	40	1100	370	400	191	300	200	161	200	310	154	63	246
250	373.8	30	—	48	1240	470	500	239	370	240	191	250	400	184	75	496
300	472.7	33.5	—	66	1480	560	600	284	440	280	231	300	480	224	90	798
350	583.5	37.5	34.5	84	1680	640	680	322	500	340	251	350	560	244	100	1134

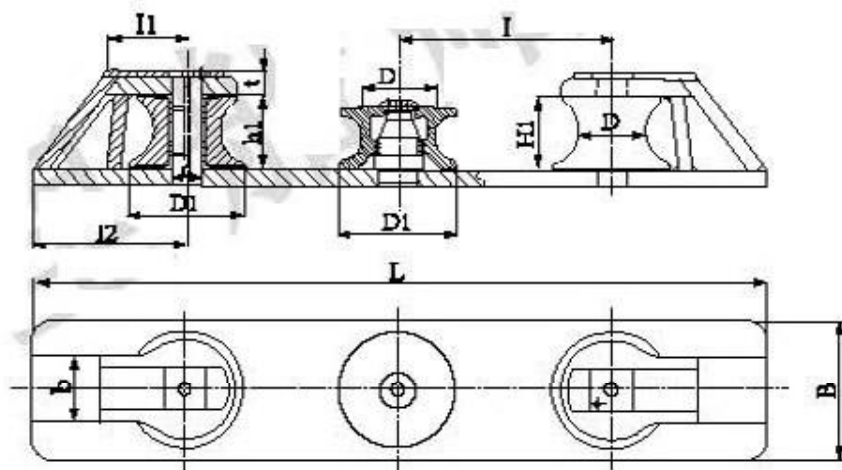导缆钳 C型 Fairlead chock Type-C
 CB/T38-99

C型导缆钳主要尺寸 Type C Fairlead chock Dimensions

公称尺寸 Nominal size	适用缆索 最大破断 负荷 Chain' s MBL (kN)	适用缆索最大直径 Max.dia.of chain			本体 Body								端部滚轮 End roller			端部轴 End axle d	中部滚轮 Mid roller			中部轴 Mid axle d1	重量 Weight kg
		钢索 Steel wire		合成 纤维索 Synthetic fiber rope	L	B	I	I1	I2	b	h1	D	D1	H1	D		D1	H1			
		6×24	6×37																		
75	23.3	7.4	—	12	550	170	150	80	125	75	70	75	120	84	22	75	120	84	34	27	
100	52.5	11	—	18	760	200	210	105	185	100	82	100	180	88	32	100	180	88	48	60	
125	83.4	16	—	24	920	280	280	128	200	125	108	125	200	102	40	125	200	102	63	116	
150	145.8	18.5	—	30	1120	300	320	150	240	150	128	150	240	120	50	150	240	120	75	198	
200	246.6	24	—	40	1420	370	410	181	300	200	161	200	310	154	63	200	310	154	96	398	
250	373.6	30	—	48	1780	470	520	239	370	240	191	250	400	184	78	250	400	184	120	787	
300	472.7	33.5	—	56	2120	550	620	284	440	290	213	300	480	224	90	300	480	224	140	1240	
350	583.5	37.5	34.5	64	2440	640	720	322	500	340	251	350	580	244	100	350	580	244	160	1786	

导缆孔 Chock





巴拿马导缆孔 AC型 Panama chock type AC
 GB11586-89或 (JIS F 2017-82)



巴拿马导缆孔 BC型 Panama chock type BC
 GB11586-89或 (JIS F 2017-82)




型号 Type	重量 Kg Weight	A	B	C	D	E
310	253	310	708	639	541	652
380	288	380	780	640	542	704
400	323	400	804	624	545	750
450	351	450	858	643	547	802
500	395	500	908	644	548	854

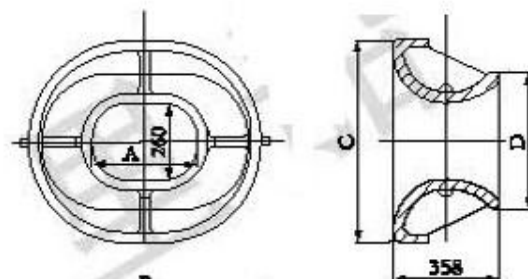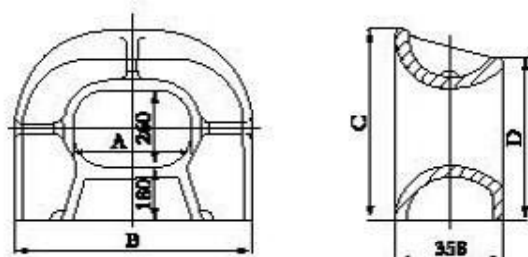

型号 Type	重量 Kg Weight	A	B	C	D	E
310	278	310	734	684	482	652
380	306	380	788	688	484	704
400	344	400	832	692	470	750
450	386	450	888	696	474	802
500	395	500	940	700	478	854


导缆孔 Chock

闭式导缆孔 Closed chock JIS F 2005-75

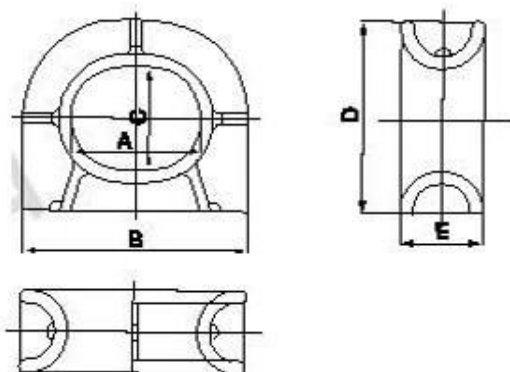

型号 Type	重量 Kg Weight	A	B	C	D	E
100	3.7	100	170	78	141	80
150	10.5	150	250	110	205	80
200	24.0	200	340	160	208	120
250	48	250	434	200	372	180
300	83	300	528	260	484	200
350	109	350	600	260	485	230
400	138	400	672	260	508	240
450	184	450	748	260	528	250
500	232	500	820	260	560	260


系泊导缆孔 Mooring chock JIS F 2007-76

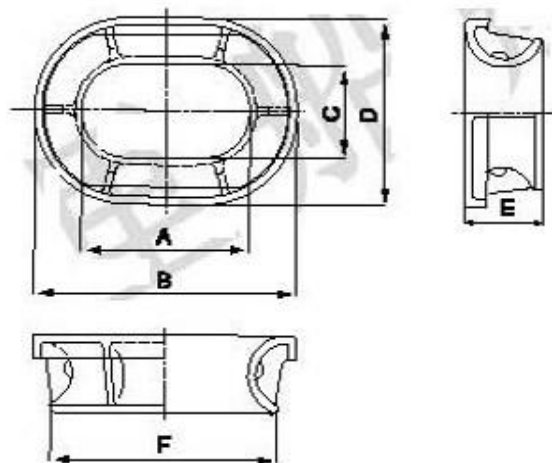

型号 Type	重量 Kg Weight	A	B	C	D	E	F
150	15.1	150	300	110	280	120	270
200	20.5	200	388	150	318	143	334
250	28.9	250	430	200	380	165	394
300	42.7	300	500	250	450	188	460
350	60.3	350	580	280	480	170	518
400	78.3	400	632	250	482	195	588
450	102	450	700	280	500	200	650
500	115	500	780	250	510	218	708


导缆孔 Chock

导缆孔 A 型 Chock Type A CB34-76

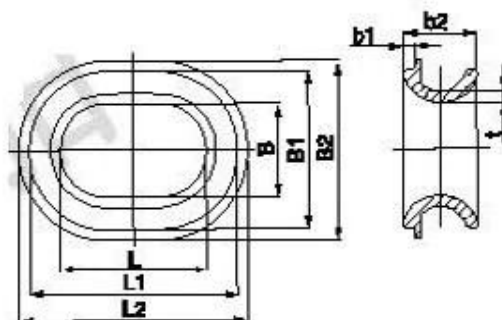

钢丝绳 最大直径 Max. steel wire dia.	索具最大绳径 Hemp rope C.	尼龙绳 最大直径 Max. nylon wire dia.	L	L1	L2	B	B1	B2	t	b1	b2	重量 Weight Kg
18.5	180	35	200	300	340	130	230	270	18	15	110	18.4
22.5	200	45	280	400	450	170	310	380	22	25	160	40.4
28.0	230	55	320	485	515	200	345	385	25	28	175	57.0
33.5	270	70	400	572	632	260	430	490	30	32	200	95.6
43.5	325	90	480	685	755	310	525	605	35	35	240	171.0


导缆孔 C 型 Chock Type C CB34-76

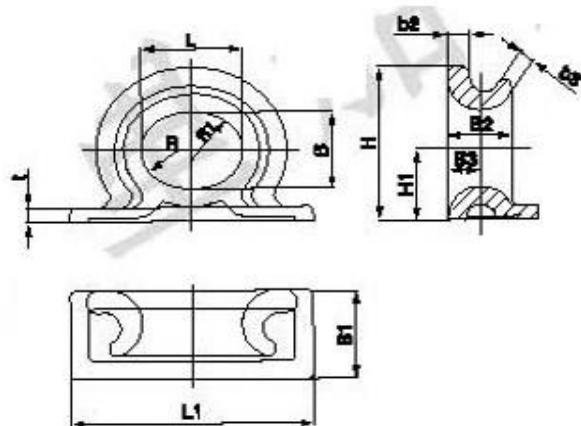


钢丝绳 最大直径 Max. steel wire dia.	索具最大绳径 Hemp rope C.	尼龙绳 最大直径 Max. nylon wire dia.	L	L1	B	B1	B2	B3	H	H1	R	R1	b2	b3	t	重量 Weight Kg
15.0	125	30	180	400	110	170	115	80	250	115	45	102	40	29	25	37.5
18.5	180	35	200	500	130	190	135	71	317	145	65	133	50	32	30	53
22.5	200	45	250	600	180	220	141	82	382	177	85	165	55	36	35	97
28.0	230	55	300	650	220	250	172	98	436	183	95	203	60	42	40	127
33.5	270	70	400	750	280	280	185	95	513	240	125	273	65	47	45	210
43.5	325	90	500	830	350	300	195	102	588	277	147	350	70	51	50	298

导缆孔 Chock


德式导缆孔 A型 Chock Type A
DIN 81915

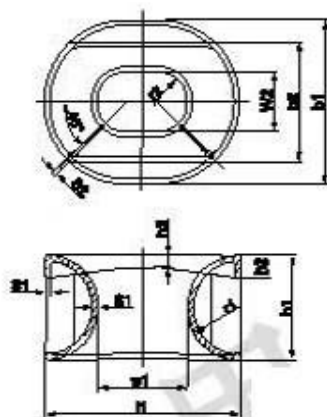


德式导缆孔 C型 Chock Type C
DIN 81915



德式导缆孔 D型 Chock Type D
DIN 81915



德式导缆孔 B型 Chock Type B
DIN 81915

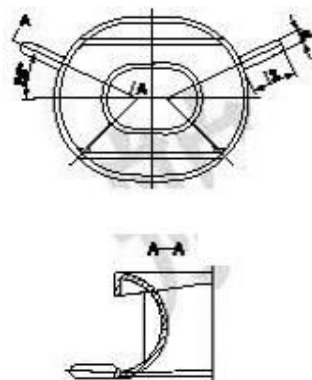

型号Type	d	l2
B3	40	140
B5	45	180
B8	50	180



型号Type	绳端工作负荷 Wire W.L. (Kn)	b1	b2	h1	h2	h3	l1	r1	r2	s1	s2	w1	w2	重量 Weight (Kg)
A 2	20	315	225	200	70	25	380	100	57.5	12	8	180	115	28
A 3	30	380	275	250	75	32	450	125	70	14	7	200	140	42
A 5	50	480	340	300	80	38	550	150	90	18	8	250	180	74
A 8	80	585	415	380	90	45	680	180	112.5	18	9	320	225	130
A 12	125	710	500	440	110	55	840	220	135	20	10	400	270	185
A 20	200	840	585	520	130	65	1020	260	160	22	11	500	320	285
A 32	320	1100	800	700	150	80	1300	350	200	35	20	800	400	795

型号Type	d	l2
D3	40	140
D5	45	180
D8	50	180

型号Type	绳端工作负荷 Wire W.L. (Kn)	a	b1	h1	l1	r1	r2	s1	s2	w1	w2	重量 Weight (Kg)
C 2	20	167.5	315	200	380	100	57.5	12	8	180	115	28
C 3	30	195	380	250	430	125	70	14	7	200	140	48
C 5	50	240	480	300	550	150	90	18	8	250	180	84.5
C 8	80	292.5	585	380	680	180	112.5	18	9	320	225	138.8
C 12	125	355	710	440	840	220	135	20	10	400	270	211.1
C 20	200	420	840	520	1020	260	160	22	11	500	320	325.2
C 32	320	580	1100	700	1300	380	200	35	20	800	400	840


导缆孔 Chock

导缆孔 B型 Chock Type B
NS2587





Nominal size	d2	d1	a2	t2	Mass Mass kg	Kodenr. Code No.
200 × 150	330	280	130	18	14.9	
300 × 200	458	358	158	20	47.0	
400 × 250	600	460	200	25	99.0	

导缆孔 B型 Chock Type B
NS2589

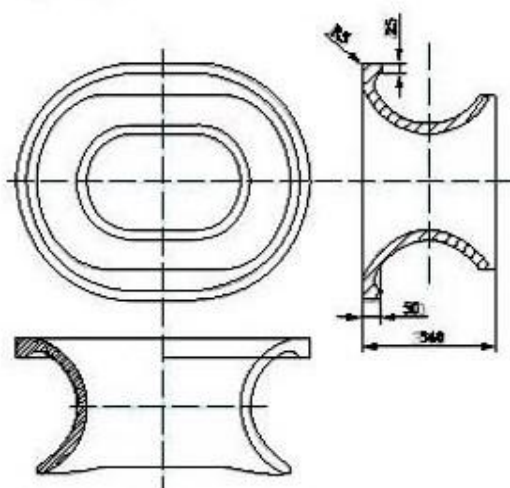

Nominal size	Mass Mass kg	Kodenr. Code No.
200 × 150	114	
300 × 200	163	

导缆孔 B型 Chock Type B
NS2590

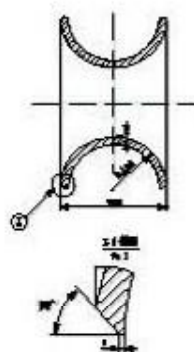

Nominal size	a	t	Mass Mass kg	KN
300 × 250	300	20	117	320
400 × 250	400	25	175	640

