


DECK MACHINERY

CHAIN STOPPER



掣链器 Chain stopper


滚轮带刀掣链器 Roller type chain stopper
 CB/T3844-2000

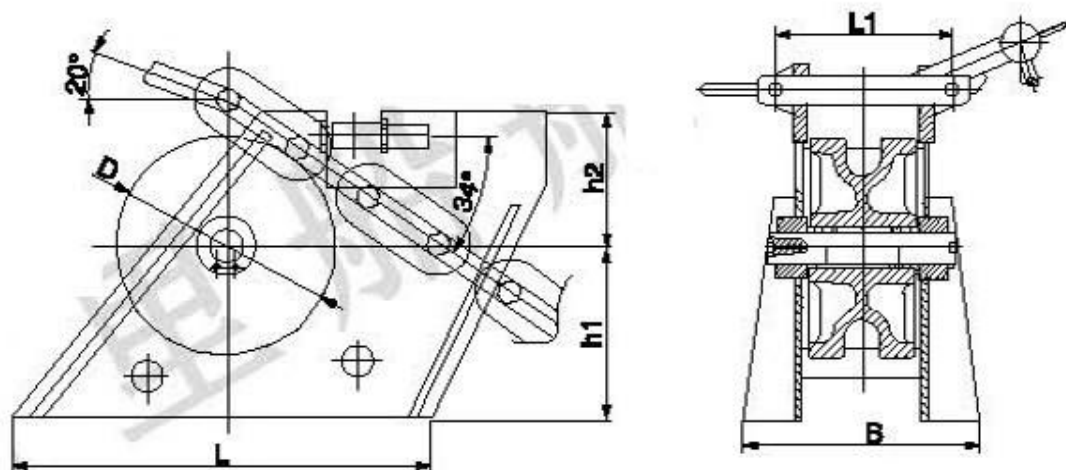

公称直径 nominal dia.	锚链直径 Anchor chain dia.	L	L1	D	h1	h2	B	重量 (kg) Weight
44	42~44	1000	370	484	382	281	380	343
48	46~48	1050	420	528	414	306	446	390
52	50~52	1100	440	572	440	338	510	480
56	54~56	1150	450	600	480	354	558	608
60	58~60	1200	470	620	490	378	610	739
64	62~64	1250	500	640	520	400	666	811
68	66~68	1300	550	680	540	420	732	1081
73	70~73	1350	570	730	580	460	800	1229
78	76~78	1400	610	780	630	480	855	1494
84	81~84	1480	650	840	670	530	940	1765
90	87~90	1640	710	900	720	570	1030	2171
96	92~96	1600	740	950	780	610	1080	2567
102	97~102	1680	790	1020	800	650	1150	2755
107	105~107	1750	840	1070	880	680	1210	3640
114	111~114	1820	880	1140	910	740	1270	4302
122	117~122	1880	930	1220	980	790	1340	5328
132	124~132	1980	1000	1320	1080	880	1440	8244


掣链器 Chain stopper

日式铸钢用刀掣链器 Japanese standard casting bar type chain stopper
 JIS F 2015-87

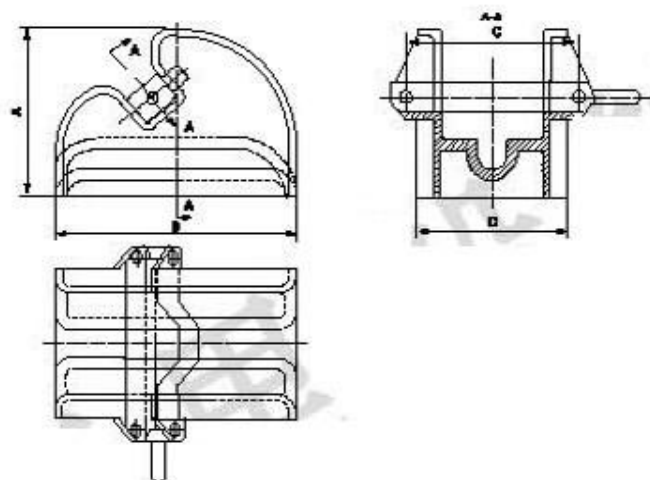

公称直径 Nominal dia.	40	44	48	52	56	60	64	68	73	78
适用的链轮直径 Suitable chain dia.	38-40	42-44	46-48	50-52	54-56	58-60	62-64	66-68	70-73	76-78
A	378	412	450	491	528	564	600	635	675	718
B	540	590	640	686	746	796	850	900	960	1020
C	390	424	460	494	530	564	600	636	678	720
D	336	366	397	428	457	488	517	547	582	617
重量 Weight (kg)	111	139	178	218	261	319	390	482	608	759


日式铸钢用刀掣链器 Japanese standard casting bar type chain stopper
 JIS F 2023-78

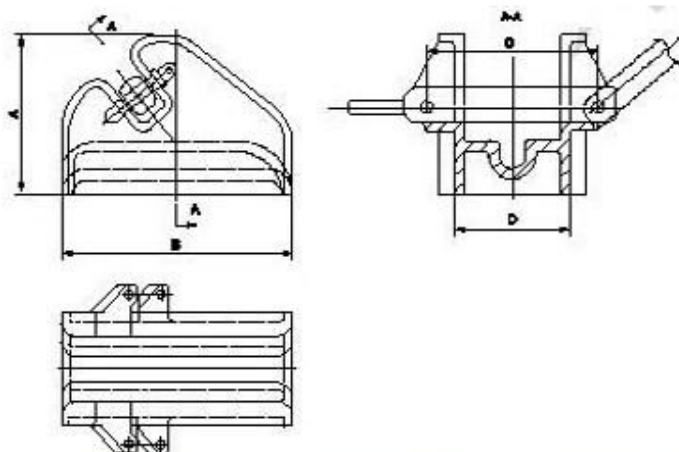

掣链器 Chain stopper

公称直径 Nominal dia.	19	22	25	28	32	36
适用的链轮直径 Suitable chain dia.	17-19	20-22	23-25	26-28	29-32	34-36
A	190	216	241	270	305	342
B	270	310	345	385	435	490
C	200	226	256	280	320	354
D	134	153	175	193	220	246
重量 Weight (kg)	17	24	33	44	68	92




铸钢带刀掣链器 Casting bar type chain stopper CB 286-84

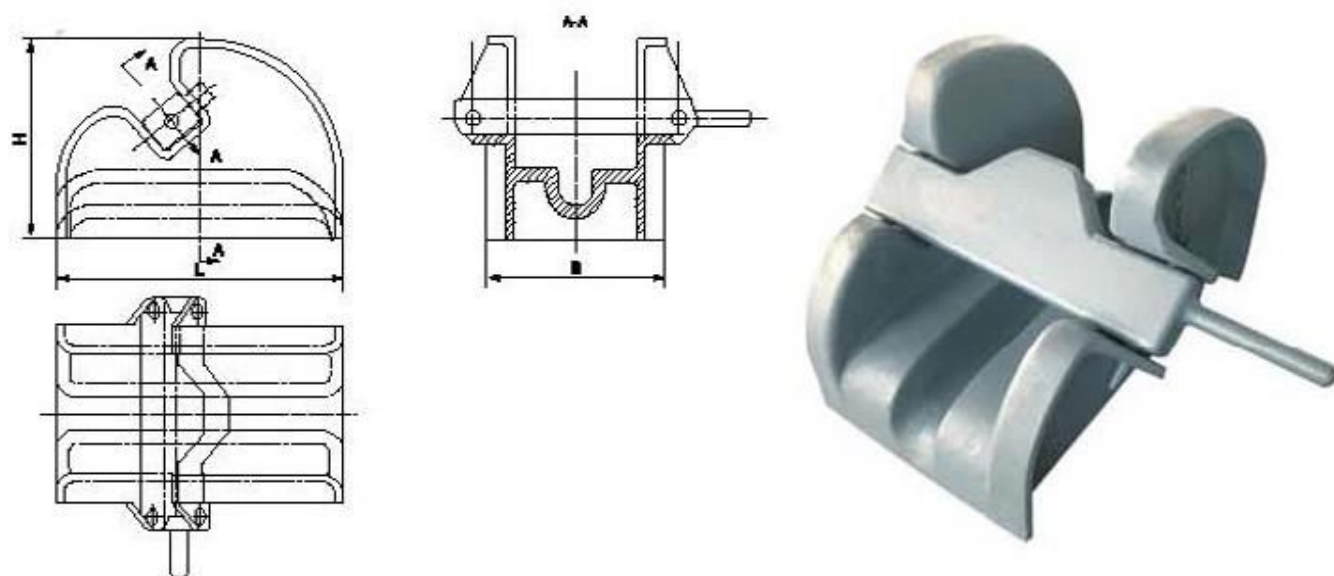

链轮直径 Anchor chain dia.	12.5	16-	18-	22-	25-	30-	34-	38-	42-	46-	60-	64-	68-	62-	66-
	-14	17.5	20.5	24	28	32	36	40	44	48	52	56	60	64	68
B	142	170	183	219	241	274	304	336	366	397	428	467	488	517	547
H	162	190	216	241	270	305	342	378	412	450	491	528	564	600	635
L	235	270	310	345	385	435	490	540	590	640	695	745	795	850	900
重量 Weight (kg)	22	28	38	45.5	58	74	92	115	145	183	225	271	352.5	424	508

掣链器 Chain stopper

螺旋掣链器 A型 Swivel type chain stopper Type A
 CB/T178-96

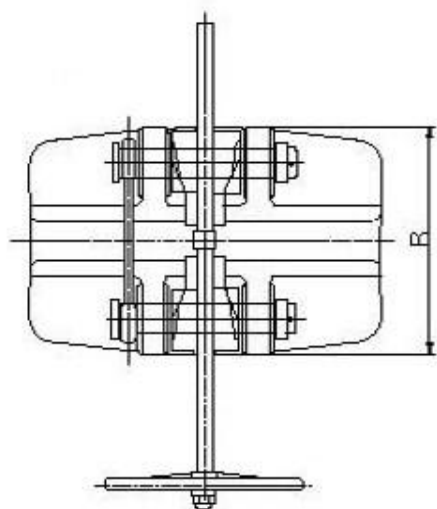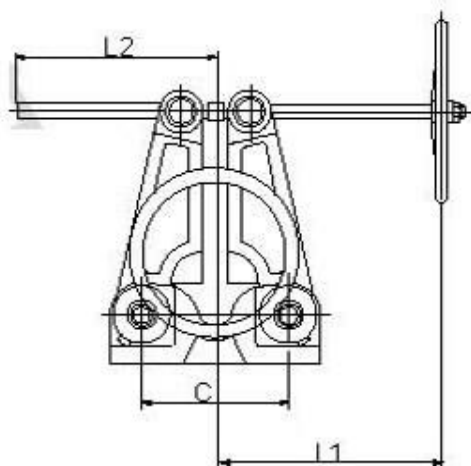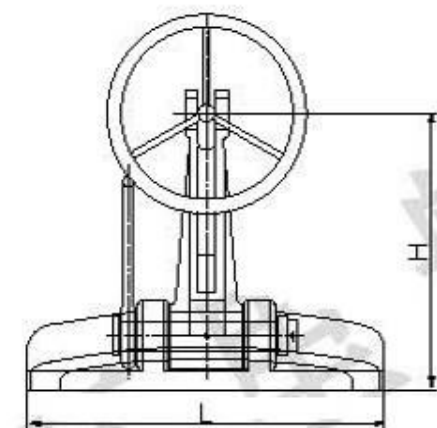


锚链直径 Anchor chain dia.	22—26	28—32	34—38	40—44	46—48	52—58	60—66
B	280	310	360	420	480	560	640
C	190	210	250	290	330	380	440
H	335	400	455	515	585	680	775
L	500	550	600	670	770	970	1000
L1	275	330	375	430	480	585	640
L2	265	320	365	415	465	545	615
重量 weight (kg)	90	122	163	238	353	518	772

非标掣链器 Non Standard Chain stopper



导链滚轮 Chain wheel


导链滚轮 Chain wheel GB/T 290-95

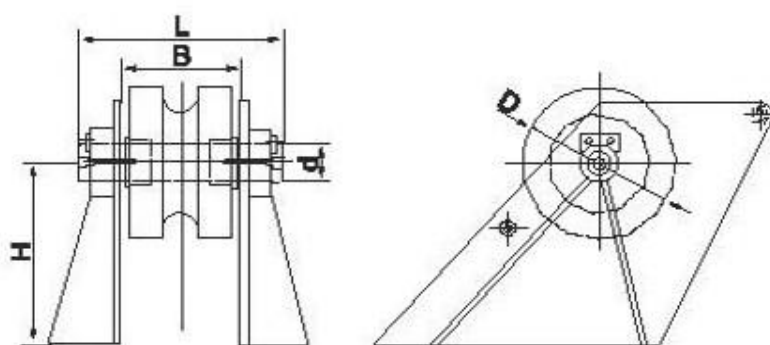

型号 Type	通用链径 Dia. of anchor chain	D	d	L	B	H	重量 Kg Weight
14	12.5~14	154	26	164	84	150	12.7
17.5	16~17.5	182	32	186	108	170	21.0
20.5	18~20.5	226	38	208	122	210	32.8
24	22~24	264	42	236	142	240	50.0
28	26~28	306	48	262	160	280	74.0
32	30~32	352	54	292	178	310	104.9
36	34~36	396	58	319	201	360	144.4
40	38~40	440	64	349	219	390	189.8
44	42~44	484	70	377	239	430	239.9
48	46~48	528	74	405	259	470	315.5
52	50~52	572	78	430	280	510	370.3
56	54~56	616	82	466	302	540	453.6
60	58~60	660	88	492	320	580	572.3
64	62~64	704	94	526	342	620	687.5
68	66~68	748	98	562	360	660	832.3


锚链舱眼环 Chain locker ring

锚链舱眼环 A型 Chain locker eye ring Type A
 CB 807-75

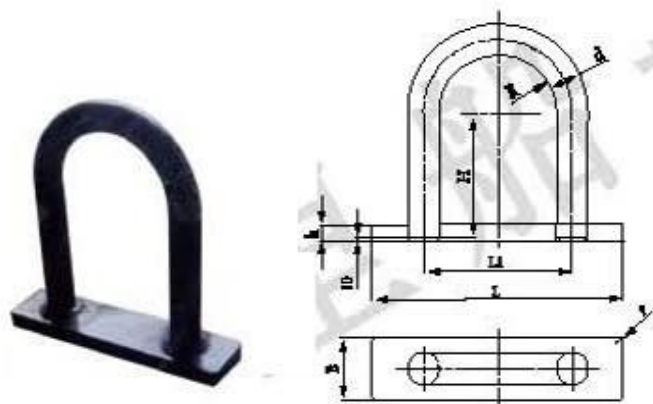

锚链直径 Dia. of chain	L	L1	B	H	d	R	h	r	重量 (kg) Weight
13-15	200	120	65	115	20	50	20	15	3.02
17-19	240	145	70	130	25	60	20	15	5.95
22-25	330	200	90	210	40	80	25	15	12.5
28-31	410	250	100	250	50	100	30	15	25
34-37	500	305	130	270	65	120	40	15	47
40-43	600	355	150	295	75	140	40	15	73



锚链舱眼环 B型 Chain locker eye ring Type B
 CB 807-75

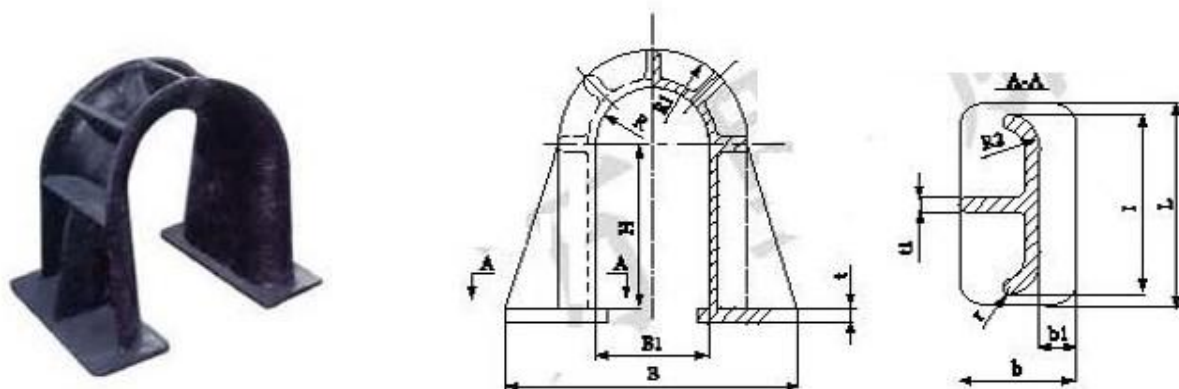

锚链直径 Dia. of chain	L	B	B1	b	b1	H	l	t	t1	R	R1	R2	r	r2	重量 (kg) Weight
48-49	550	700	320	230	50	330	470	15	15	180	285	105	7.5	30	134.7
53-57	580	800	380	240	50	360	500	20	15	190	305	115	10	30	155
62-67	660	850	450	280	50	405	560	25	20	225	355	140	12.5	50	334
72-77	790	1080	510	320	60	440	690	30	20	255	410	155	15	50	482
82-87	950	1240	580	370	60	480	850	35	25	290	475	185	17.5	50	749
92-100	1080	1420	680	420	60	555	980	40	30	330	560	220	20	50	1055

弃锚器 Anchor releaser

插肩弃锚器 Dog type cable clenches anchor releaser
 CB/T 3143-83 JIS F 2025-92

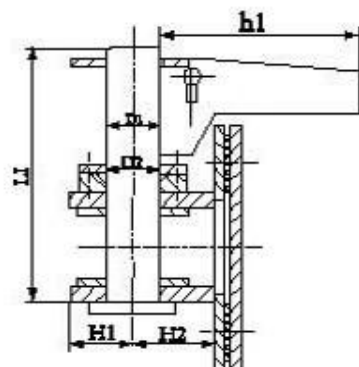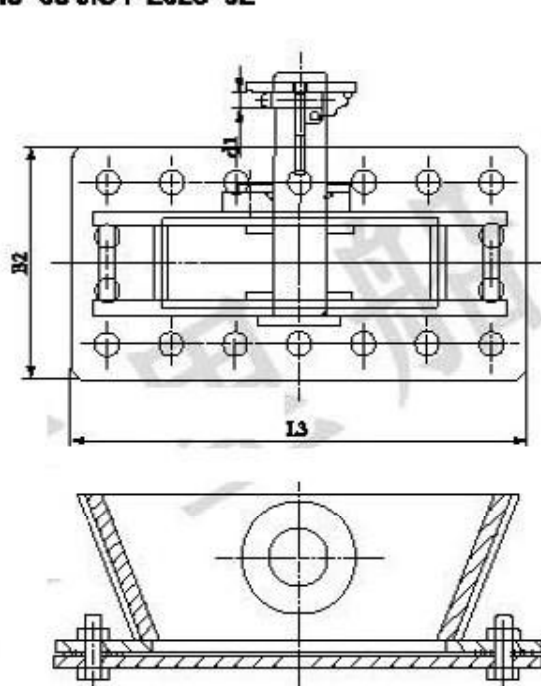

CB/T3143-83



型号 Type	适用链径 Dia. of anchor chain	L1	L3	B2	H1	H2	D1	D2	h1	d1	重量 Weight (Kg)
52	50-52	384	480	238	83	82	54	57	190	18	40.5
58	54-58	420	488	248	88	88	58	61	194	18	48.0
60	58-60	448	504	254	74	94	62	65	198	18	53.9
64	62-64	478	524	264	80	100	66	69	202	18	60.0
68	66-68	504	542	272	84	107	70	73	207	18	70.8
73	70-73	540	570	282	87	114	75	78	212	18	81.4
78	76-78	578	594	292	95	122	80	83	217	19	92.8
84	81-84	624	628	302	102	131	85	88	223	19	106
90	87-90	670	680	316	110	140	90	93	230	19	128
95	92-95	708	686	330	118	148	95	98	235	22	146
102	98-102	782	724	348	128	158	100	103	242	22	188
111	105-111	828	770	364	139	171	110	110	251	22	231
120	114-120	892	810	386	150	184	120	123	260	22	274

JIS F 2025-92

型号 Type	适用链径 Dia. of anchor chain	L1	L3	B2	H1	H2	D1	D2	h1	d1	重量 Weight (Kg)
52	50-52	384	480	238	83	82	54	57	190	8	40.5
58	54-58	420	488	248	88	88	58	61	194	8	48.0
60	58-60	448	504	254	74	94	62	65	198	8	53.9
64	62-64	478	524	264	80	100	66	69	202	8	60.0
68	66-68	504	542	272	84	107	70	73	207	8	70.8
73	70-73	540	570	282	87	114	75	78	212	8	81.4
78	76-78	578	594	292	95	122	80	83	217	8	92.8
84	81-84	624	628	302	102	131	85	88	223	10	106
90	87-90	670	680	316	110	140	90	93	230	10	128
95	92-95	708	686	330	118	148	95	98	235	10	146
102	98-102	782	724	348	128	158	100	103	242	10	188
111	105-111	828	770	364	139	171	110	110	251	10	231
120	114-120	892	810	386	150	184	120	123	260	10	274

弃锚器 Anchor releaser


插口弃锚器 Dog type cable clenches anchor releaser
 CB/T 3143-99

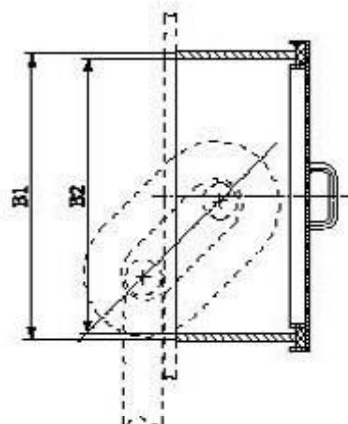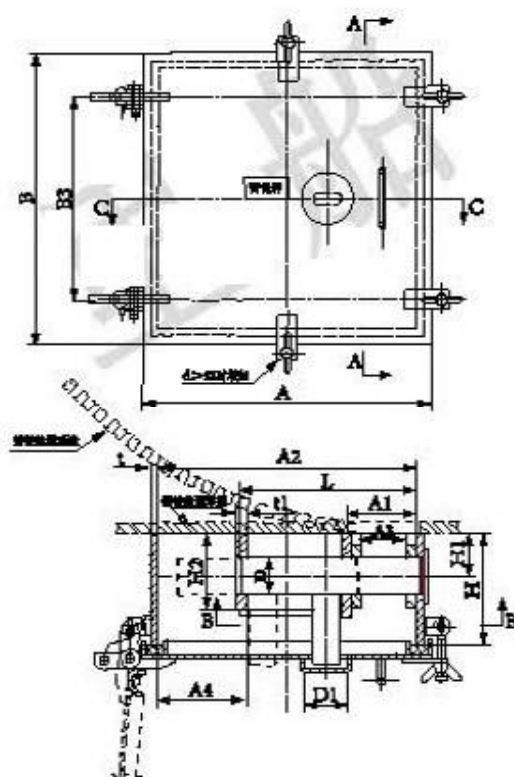

公称尺寸 Nominal size	适用于锚 链直径 Dia. of anchor chain	A	A1	A2	A3	A4	B	B1	B2	B3	H	H1	H2	D	D1	L	t	t1	重量 Weight kg
52	50~52	466	102	400	68	146	396	346	332	250	175	63	110	54	80	296	14	20	65
56	54~56	501	112	435	74	146	488	434	420	300	180	70	125	58	90	301	14	25	114
60	58~60	541	122	475	80	163	516	464	450	300	185	75	135	62	95	328	14	25	127
64	62~64	548	137	480	84	173	548	498	480	400	220	82	140	66	95	330	14	25	143
68	66~68	588	144	500	88	176	572	516	504	400	230	88	150	70	95	339	16	25	177
73	70~73	604	148	538	94	187	608	558	540	400	246	90	168	75	95	364	16	25	221
78	76~78	638	162	570	102	197	644	596	570	450	248	94	168	80	95	368	16	25	225
84	81~84	696	168	630	108	210	688	636	620	450	260	102	185	85	100	434	16	28	236
90	87~90	730	178	668	116	225	740	686	670	500	280	110	200	90	100	482	18	28	302
95	92~95	770	188	700	124	257	780	730	710	500	288	110	200	95	100	467	18	28	335
102	97~102	824	188	750	132	276	784	730	710	500	315	130	210	100	100	498	22	28	396
111	105~111	888	222	810	142	288	788	730	710	500	370	150	260	110	110	581	24	30	604
120	114~120	906	248	830	156	286	786	730	710	500	380	170	270	112	110	606	24	36	820


弃锚器 Anchor releaser

螺旋弃锚器 Swivel type anchor releaser
 CB 289-81

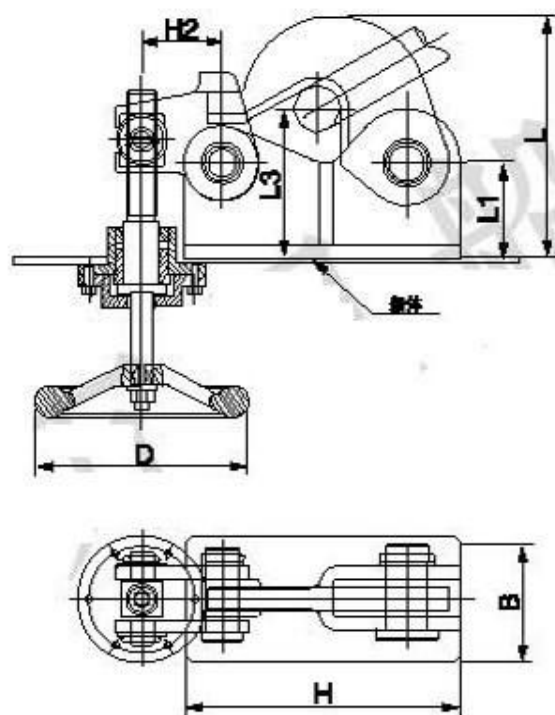

锚链直径 Dia. of chain	A	D	L	L1	L3	H	H2	重量Kg Weight
25-34	120	200	228	90	140	280	80	20
37-43	140	250	243	90	145	300	96	36
46-58	180	320	327	125	197	380	120	78
67-67	220	400	390	140	228	480	140	104
72-82	235	400	425	160	250	510	148	148
87-102	250	400	457	180	272	560	150	183
107-122	270	400	485	175	285	630	170	


水密螺旋弃锚器 Watertight swivel type anchor releaser
 CB 887-77

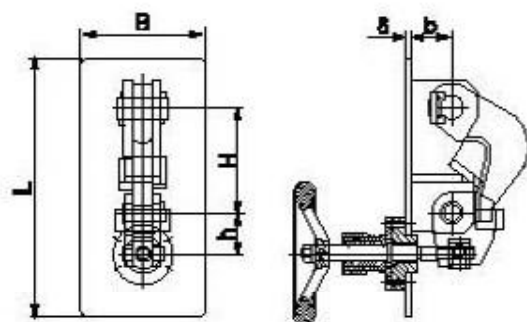

锚链直径 Dia. of chain	H	h	b	L	B	s	D	d	l	重量Kg Weight
28	120	65	60	500	200	10	T24×5	18	45	22.73
31	140	70	70	510	210	10	T26×5	18	45	27.74
34	180	70	70	510	210	10	T26×5	18	45	28.1
43	220	75	80	550	250	12	T26×5	18	45	48.67
46	235	85	80	580	260	14	T32×6	18	45	63.63
53	250	90	90	575	275	14	T32×6	18	45	78.30
57	270	90	90	575	275	14	T32×6	18	45	79.47



弃锚器 Anchor releaser

德式弃锚器 German standard anchor releaser
DIN 81906

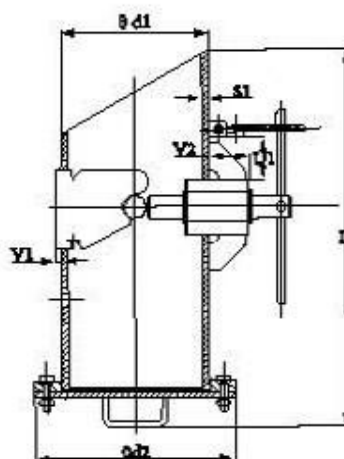

锚链直径	$\Phi d1 \times s1$	$\Phi d2$	$l1 \approx$	$u1$	$u2$	$u3$
36 38 40 42 44 46	273 x 12, 5	375	735	75	10	75
48 50 52 54 56	323, 8 x 14, 2	440	835	85	12	80
58 60 62 64 66 68	406, 4 x 16	540	905	110	14	85
70 73 76 78 81	508 x 17, 5	645	1245	105	15	100
84 87 90 92	508 x 17, 5	645	1245	130	15	150
95 97 100 102 105	810 x 20	754	1430	130	15	150
107 111 114	810 x 20	754	1430	170	15	155
117 120 122 124 127	711 x 22, 2	855	1615	170	20	155
130 132 137	813 x 22, 2	955	1790	170	20	155
142 147 152	914 x 25	1060	1970	190	22	200


简易弃锚器 Simple anchor releaser CB*531-66

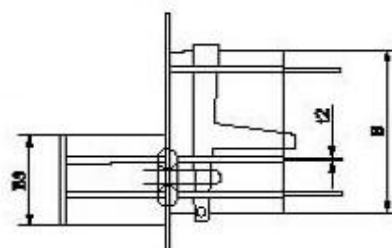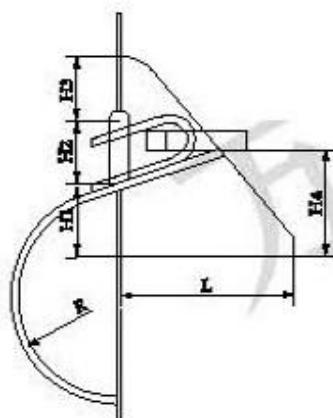

锚链直径 Chain dia	L	B	B1	H1	H2	H3	H4	R	t2	重量 Weight (kg)
17-19	160	238	140	90	100	100	118	100	4	8.93
22-25	195	270	170	110	130	110	145	125	4	14.36
28-31	255	305	200	130	160	120	180	150	5	25.41
34-37	324	350	230	150	190	130	215	175	6	36.86

掣锚索、掣链钩 Anchor stopper、Chain stop hook

掣锚索 Anchor stopper
CB*877-84

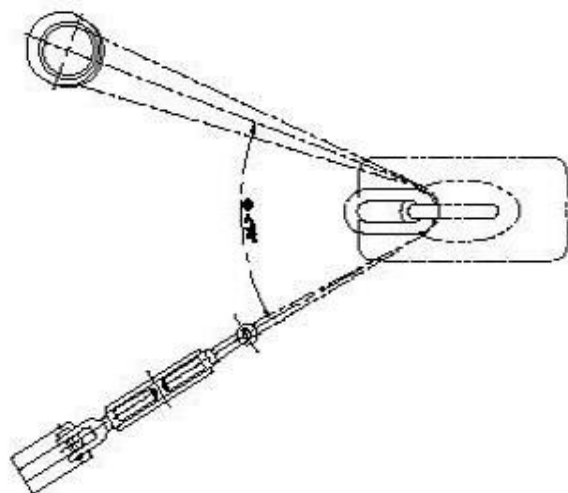

重量 (kg) Weight of anchor	钢丝绳 Steel wire GB 1102-74			开式吊钩组 Open turnbuckle CBM 2022		眼板 Eye plate CB 60-79	
	型号 Type	直径 Dia. (mm)	数量 (QTY)	型号 Type	数量 (QTY)	型号 Type	数量 (QTY)
500	6×19	8.2	1	UU1.0	1	A0.8	1
900	6×19	7.4	1	UU1.2	1	A1.2	1
1820	6×19	8.7	1	UU2.0	1	A2.1	1
2850	6×19	11	1	UU3.2	1	A3.5	1
3780	6×19	13	1	UU4.0	1	A4.5	1
6000	6×19	15	1	UU6.3	1	A5.0	1
7800	6×19	17.5	1	UU8.0	1	A8.5	1
9800	6×19	19.5	1	UU10.0	1	A11	1
12300	6×19	21.5	1	UU12.5	1	A14	1

掣链钩 Chain stop hook
CB 288-84



链径直径 Dia. of chain mm	叉钩 Fork hook		卸扣 Shackle GB 593-85		末端卸扣 End shackle GB 548-85	管状卸扣 Nominal chain ring GB 548-85	开式吊钩组 Open turnbuckle GB 591-85		眼板 Eye plate CB 60-84		成套重量 One set weight kg
	型号 Type	数量 QTY	规格 Size	数量 QTY	链径 Chain Dia. d	链径 Chain Dia. d	规格 Size	数量 QTY	规格 Size	数量 QTY	
13-15	1	1	GD0.5	2	11	11	ED.6	1	A0.6	1	1.88
17-18	2	1	GD0.8	2	11	11	ED.8	1	A0.8	1	2.75
22-28	3	1	GD1.2	2	11	11	E1.2	1	A1.2	1	4.80
28-31	4	1	GD1.7	2	13	13	E1.7	1	A1.7	1	7.11
34-37	6	1	GD2.1	2	16	16	E2.1	1	A2.1	1	10.80
40-43	8	1	GD3.5	2	19	19	F3.5	1	A3.5	1	20.80
46-48	7	1	GD4.5	2	22	22	F4.5	1	A4.5	1	28.04
53-57	8	1	GD6.0	2	25	25	F6.0	1	A6.0	1	46.01
62-67	8	1	GD8.5	2	31	31	F8.5	1	A8.5	1	77.86